CONTACT

LINGLONG AMERICAS, INC.

E-mail:
linglong_sales@linglong.cn

Address:
Linglong Americas
1484 Medina Road Suite 118
Medina, OH 44256

Web:
leao-tire.com

Catalog

Web

@leaotire2025

@leaotire2025



Passenger Car & Light Truck Tire

CATALOG

www.leao-tire.com

LEAD SAFELY

LEAO TIRE



LEAD SAFELY

www.leao-tire.com

LEAO TIRE

LEAD SAFELY

TABLE OF CONTENTS

COMPANY INTRODUCTION 04

BRAND VALUE 05

GLOBAL LAYOUT 07

ALL SEASON / ALL WEATHER （3PMSF） 09

PASSENGER CAR

LION SPORT[3] 11

LION SPORT HP[3] 14

SPECIAL TRAILER

LAR781 18

SUV & LIGHT TRUCK

NEW LION CLIMBER X/T (3PMSF) 19

NEW LION CLIMBER R/T (3PMSF) 23

LION SPORT 4X4[HP3] 27

LION SPORT H/T 29

LION SPORT A/T 31

LION SPORT M/T 34

WINTER 37

I-17 38

Replacement Market Tires Warranty Manual 41



COMPANY INTRODUCTION

Founded in 1975, Shandong Linglong Tyre Co., Ltd. has grown into one of the world's leading tire manufacturers, delivering innovative and high-performance tire solutions to customers across more than 170 countries. As a vertically integrated manufacturer, Linglong combines advanced research and development, intelligent manufacturing, global supply chain capabilities, and comprehensive customer support to meet the evolving needs of the automotive and commercial transportation industries.

https://www.leao-tire.com

LEAO TIRE

Our retail network consists of

200,000

outlets globally, promoting our brand reputation and customer loyalty

Sold in over 170 countries worldwide, Linglong Tire is a trusted global manufacturer supplying original equipment (OE) tires to more than 200 vehicle production facilities for over 70 leading automotive brands. With more than 300 million OE tires delivered globally, Linglong's proven engineering, quality, and manufacturing expertise provide distributors, dealers, fleets and OEM partners across the globe with reliable, high-performance tire solutions backed by global scale and consistent supply.

Linglong's brand value reached

17.85

Billion dollars in 2026

Linglong has sponsored over

100

Sports events and teams worldwide

SPONSORING SOME OF THE BIGGEST NAMES IN SPORTS

Such as Real Madrid CF and Chelsea FC, to enhance its brand awareness and influence.



GLOBAL LAYOUT



R&D Center in the United States

R&D Center in Germany

Serbia

Linglong International Europe d.o.o.Zrenjanin

Linglong International Tyre(Thailand)Co.,Ltd

Open R&D Innovation System

3 Countries

8 R&D Centers

1500+ Authorized Patents

2000+ Technical Team

Global Strategic Layout

Linglong Tire's global manufacturing network is built on a strategic "Globalization + Regionalization + Localization" approach, enabling the company to efficiently serve customers across key markets worldwide. With multiple production facilities throughout China and international manufacturing hubs in Thailand and Serbia, Linglong delivers scalable production capacity, reliable supply chain performance, and localized market support to distributors, dealers, fleets, and OEM partners around the world.

Production Bases Outside China

- Linglong International Tyre (Thailand) Co., Ltd.
- Linglong International Europe d.o.o. Zrenianin

Production Bases in China

- Jilin Linglong Tyre Co., Ltd.
- Shandong Linglong Tyre Co., Ltd.
- Dezhou Linglong Tyre Co., Ltd.
- Hubei Linglong Tyre Co., Ltd.
- Guangxi Linglong Tyre Co., Ltd.
- Under continuous evaluation.

Choose the Right Tire with Confidence

Explore our product portfolio to find the tire engineered for your vehicle, application and performance needs.





	Ultra-High Performance	High Performance	SUV	Highway Terrain	All-Terrain	Extreme All-Terrain
	LION SPORT 3	LION SPORT HP3	LION SPORT 4X4 HP3	LION SPORT H/T	LION SPORT A/T	LION CLIMBER X/T
						
Sports Car	◉	○				
Luxury Performance Touring	○	◉	○			
Car & Minivan		◉	○			
CUV & SUV		○	◉	◉	○	○
Light Truck & Pickup			○	○	◉	◉
Light Commercial					○	○



	Rugged Terrain	Mud Terrain	Winter
	LION CLIMBER R/T	LION SPORT M/T	I-17
			
Sports Car			○
Luxury Performance Touring			○
Car & Minivan			◉
CUV & SUV	○	○	◉
Light Truck & Pickup	◉	◉	
Light Commercial	○	○	

◉ Best match

○ Secondary match



ALL SEASON

LEAD SAFELY

www.leao-tire.com

LEAO TIRE

PASSENGER CAR

LION SPORT ³ 11

LION SPORT HP³ 14

SPECIAL TRAILER

LA R781 16



LION SPORT ³ | LION SPORT HP³ | LA R781

LION SPORT 3

Ultra-High Performance Tire

An ultra high-performance tire engineered for precise handling, exceptional grip, and confident control.



Asymmetric tread pattern design for better handling performance

Excellent drainage performance to effectively reduce risk of hydroplaning

Rim	Size	Ply Rating	Load index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
16	195/45R16 XL	-	84	V	6 1/2J	500	1102	340	50
	205/50R16 XL	-	91	W	6 1/2J	615	1356	340	50
	205/55R16 XL	-	94	W	6 1/2J	670	1477	340	50
	215/55R16 XL	-	97	W	7J	730	1609	340	50
	225/50R16 XL	-	96	V	7J	710	1565	340	50
17	205/40R17 XL	-	84	W	7 1/2J	500	1102	340	50
	205/45R17 XL	-	88	W	7J	560	1235	340	50
	205/50R17 XL	-	93	W	6 1/2J	650	1433	340	50
	215/40R17 XL	-	87	W	7 1/2J	545	1201	340	50
	215/45R17 XL	-	91	W	7J	615	1356	340	50
	215/55R17 XL	-	98	W	7J	750	1653	340	50
	225/45R17 XL	-	94	W	7 1/2J	670	1477	340	50
	225/50R17 XL	-	98	W	7J	750	1653	340	50
	235/45R17 XL	-	97	W	8J	730	1609	340	50
	245/40R17 XL	-	95	W	8 1/2J	690	1521	340	50
	245/45R17 XL	-	99	W	8J	775	1709	340	50

LION SPORT 3

Ultra-High Performance Tire

Rim	Size	Ply Rating	Load index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
18	215/35R18 XL	-	84	W	7 1/2J	500	1102	340	50
	215/40R18 XL	-	89	Y	7 1/2J	580	1279	340	50
	225/40R18 XL	-	92	Y	8J	630	1389	340	50
	225/45R18 XL	-	95	W	7 1/2J	690	1521	340	50
	225/50R18	-	95	V	7J	690	1521	300	44
	235/40R18 XL	-	95	W	8 1/2J	690	1521	340	50
	235/45R18 XL	-	98	Y	8J	750	1653	340	50
	235/50R18 XL	-	101	W	7 1/2J	825	1819	340	50
	245/40R18 XL	-	97	W	8 1/2J	730	1609	340	50
	245/45R18 XL	-	100	W	8J	800	1765	340	50
	255/40R18 XL	-	99	Y	9J	775	1709	340	50
	255/45R18 XL	-	103	W	8 1/2J	875	1929	340	50
	265/35R18 XL	-	97	W	9 1/2J	730	1609	340	50
	275/40R18 XL	-	103	Y	9 1/2J	875	1929	340	50
19	225/35R19 XL	-	88	W	8J	560	1235	340	50
	235/35R19 XL	-	91	W	8 1/2J	615	1356	340	50
	235/40R19 XL	-	96	Y	8 1/2J	710	1565	340	50
	235/55R19 XL	-	105	W	7 1/2J	925	2039	340	50
	245/40R19 XL	-	98	W	8 1/2J	750	1653	340	50
	245/45R19 XL	-	102	W	8J	850	1874	340	50
	255/35R19 XL	-	96	W	9J	710	1565	340	50
	255/40R19 XL	-	100	Y	9J	800	1764	340	50
	255/45R19 XL	-	104	Y	8 1/2J	900	1984	340	50
	275/30R19 XL	-	96	W	9 1/2J	710	1565	340	50
	275/35R19 XL	-	100	Y	9 1/2J	800	1764	340	50
	275/40R19 XL	-	105	Y	9 1/2J	925	2039	340	50
20	225/35R20 XL	-	90	W	8J	600	1323	340	50
	235/30R20 XL	-	88	Y	8 1/2J	560	1235	340	50
	235/45R20 XL	-	100	W	8J	800	1764	340	50
	245/35R20 XL	-	95	W	8 1/2J	690	1521	340	50
	245/40R20 XL	-	99	Y	8 1/2J	775	1709	340	50
	245/45R20 XL	-	103	W	8J	875	1929	340	50

LION SPORT 3

Ultra-High Performance Tire

Rim	Size	Ply Rating	Load index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
20	245/50R20	-	102	V	7 1/2J	850	1874	300	44
	255/35R20 XL	-	97	W	9J	730	1609	340	50
	255/45R20 XL	-	105	Y	8 1/2J	925	2039	340	50
	275/30R20 XL	-	97	Y	9 1/2J	730	1609	340	50
	275/35R20 XL	-	102	Y	9 1/2J	850	1874	340	50
	275/40R20 XL	-	106	W	9 1/2J	950	2094	340	50
	275/45R20 XL	-	110	V	9J	1060	2337	340	50
	275/55R20 XL	-	117	W	8 1/2J	1285	2833	340	50
	285/30R20 XL	-	99	W	10J	775	1709	340	50
	315/35R20 XL	-	110	W	11J	1060	2337	340	50
22	235/30R22 XL	-	90	W	8 1/2J	600	1323	340	50
	245/30R22 XL	-	92	W	8 1/2J	630	1389	340	50
	255/30R22 XL	-	95	V	9J	690	1521	340	50
	265/35R22 XL	-	102	W	9 1/2J	850	1874	340	50
	265/30R22 XL	-	97	W	9 1/2J	730	1609	340	50
	265/40R22 XL	-	106	V	9 1/2J	950	2094	340	50
	285/35R22 XL	-	106	W	10J	950	2094	340	50
	285/40R22 XL	-	110	V	10J	1060	2337	340	50
	285/45R22 XL	-	114	V	9 1/2J	1180	2601	340	50
	295/25R22 XL	-	97	W	10 1/2J	730	1609	340	50
	305/25R22 XL	-	99	Y	11J	775	1709	340	50
	305/40R22 XL	-	114	V	11J	1180	2601	340	50
	305/45R22 XL	-	118	V	10J	1320	2910	340	50
24	255/30R24 XL	-	97	W	9J	730	1609	340	50
	275/25R24 XL	-	96	W	10J	710	1565	340	50
	295/35R24 XL	-	110	V	10 1/2J	1060	2337	340	50
	305/35R24 XL	-	112	V	11J	1120	2469	340	50
26	275/25R26 XL	-	98	W	10J	750	1653	340	50
	295/30R26 XL	-	107	W	10 1/2J	975	2149	340	50
	305/30R26 XL	-	109	W	11J	1030	2271	340	50
28	295/25R28 XL	-	103	V	10 1/2J	875	1929	340	50
	275/25R28 XL	-	99	W	10J	775	1709	340	50
30	275/25R30 XL	-	101	W	10J	825	1819	340	50

LION SPORT HP 3

High Performance Tire

A high-performance tire built for responsive handling, driving stability & enhanced ride comfort



- Good straight-line stability
- Enhanced comfort and quietness
- Improved drainage performance to effectively reduce risk of hydroplaning

Rim	Size	Ply Rating	Load index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
12	175/70R12	-	80	H	5.00B	450	992	300	44
13	185/60R13	-	80	H	5.50B	450	992	300	44
14	175/65R14	-	82	H	5J	475	1047	300	44
	185/60R14	-	82	H	5 1/2J	475	1047	300	44
	185/65R14	-	86	H	5 1/2J	530	1168	300	44
	185/70R14	-	88	H	5 1/2J	560	1235	300	44
	195/70R14	-	91	H	6J	615	1356	300	44
15	185/60R15	-	84	H	5 1/2J	500	1102	300	44
	185/65R15	-	88	H	5 1/2J	560	1235	300	44
	195/50R15 XL	-	86	V	6J	530	1168	340	50
	195/55R15	-	85	V	6J	515	1135	300	44
	195/65R15	-	91	H	6J	615	1356	300	44
	205/65R15	-	94	H	6J	670	1477	300	44
	215/60R15	-	94	H	6 1/2J	670	1477	300	44
	215/65R15 XL	-	100	H	6 1/2J	800	1764	340	50
	225/70R15	-	100	T	6 1/2J	800	1764	300	44

LION SPORT HP 3

High Performance Tire

Rim	Size	Ply Rating	Load index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
16	195/55R16	-	87	V	6J	545	1201	300	44
	205/55R16	-	91	H	6 1/2J	615	1356	300	44
	205/60R16	-	92	H	6J	630	1389	300	44
	205/65R16	-	95	H	6J	690	1521	300	44
	215/60R16	-	95	H	6 1/2J	690	1521	300	44
	215/65R16	-	98	H	6 1/2J	750	1653	300	44
	225/55R16	-	95	V	7J	690	1521	300	44
	225/60R16	-	98	H	6 1/2J	750	1653	300	44
	225/65R16	-	100	H	6 1/2J	800	1764	300	44
	225/70R16 XL	-	107	H	6 1/2J	975	2149	340	50
	235/60R16	-	100	H	7J	800	1764	300	44
	235/65R16	-	103	H	7J	875	1929	300	44
17	215/50R17 XL	-	95	V	7J	690	1521	340	50
	215/55R17	-	94	V	7J	670	1477	300	44
	215/60R17	-	96	H	6 1/2J	710	1565	300	44
	215/65R17	-	99	H	6 1/2J	775	1709	300	44
	225/55R17	-	97	H	7J	730	1609	300	44
	225/60R17	-	99	H	6 1/2J	775	1709	300	44
	225/65R17	-	102	H	6 1/2J	850	1874	300	44
	235/55R17	-	99	H	7 1/2J	775	1709	300	44
	235/60R17	-	102	H	7J	850	1874	300	44
	235/65R17	-	104	H	7J	900	1984	300	44
18	225/55R18	-	98	H	7J	750	1653	300	44
	235/65R18	-	106	H	7J	950	2094	300	44


LA R781

Special trailer



- Improved fuel efficiency
- Specially designed for trailer

Rim	Size	Ply Rating	Load index	Speed Symbols	Standard Rim	Standard Load	
						kg	lbs
13	ST175/80R13	6PR	91/87	M	5J	D 545 S 615	D 1200 S 1360
14	ST205/75R14	6PR	100/96	M	5 1/2J	D 710 S 800	D 1570 S 1760
	ST205/75R14	8PR	105/101	M	5 1/2J	D 825 S 925	D 1820 S 2040
	ST215/75R14	6PR	102/98	M	6J	D 750 S 850	D 1650 S 1870
15	ST205/75R15	8PR	107/102	M	5 1/2J	D 850 S 975	D 1870 S 2150
	ST205/75R15	6PR	101/97	M	5 1/2J	D 730S 825	D 1610 S 1820
	ST225/75R15	8PR	113/108	M	6J	D 1000 S 1150	D 2200 S 2540
	ST225/75R15	10PR	117/112	M	6J	D 1120 S 1285	D 2470 S 2830
16	ST235/80R16	10PR	123/119	M	6 1/2J	D 1360 S 1550	D 3000 S 3420
	ST235/85R16	10PR	125/121	M	6 1/2J	D 1450 S 1650	D 3200 S 3640

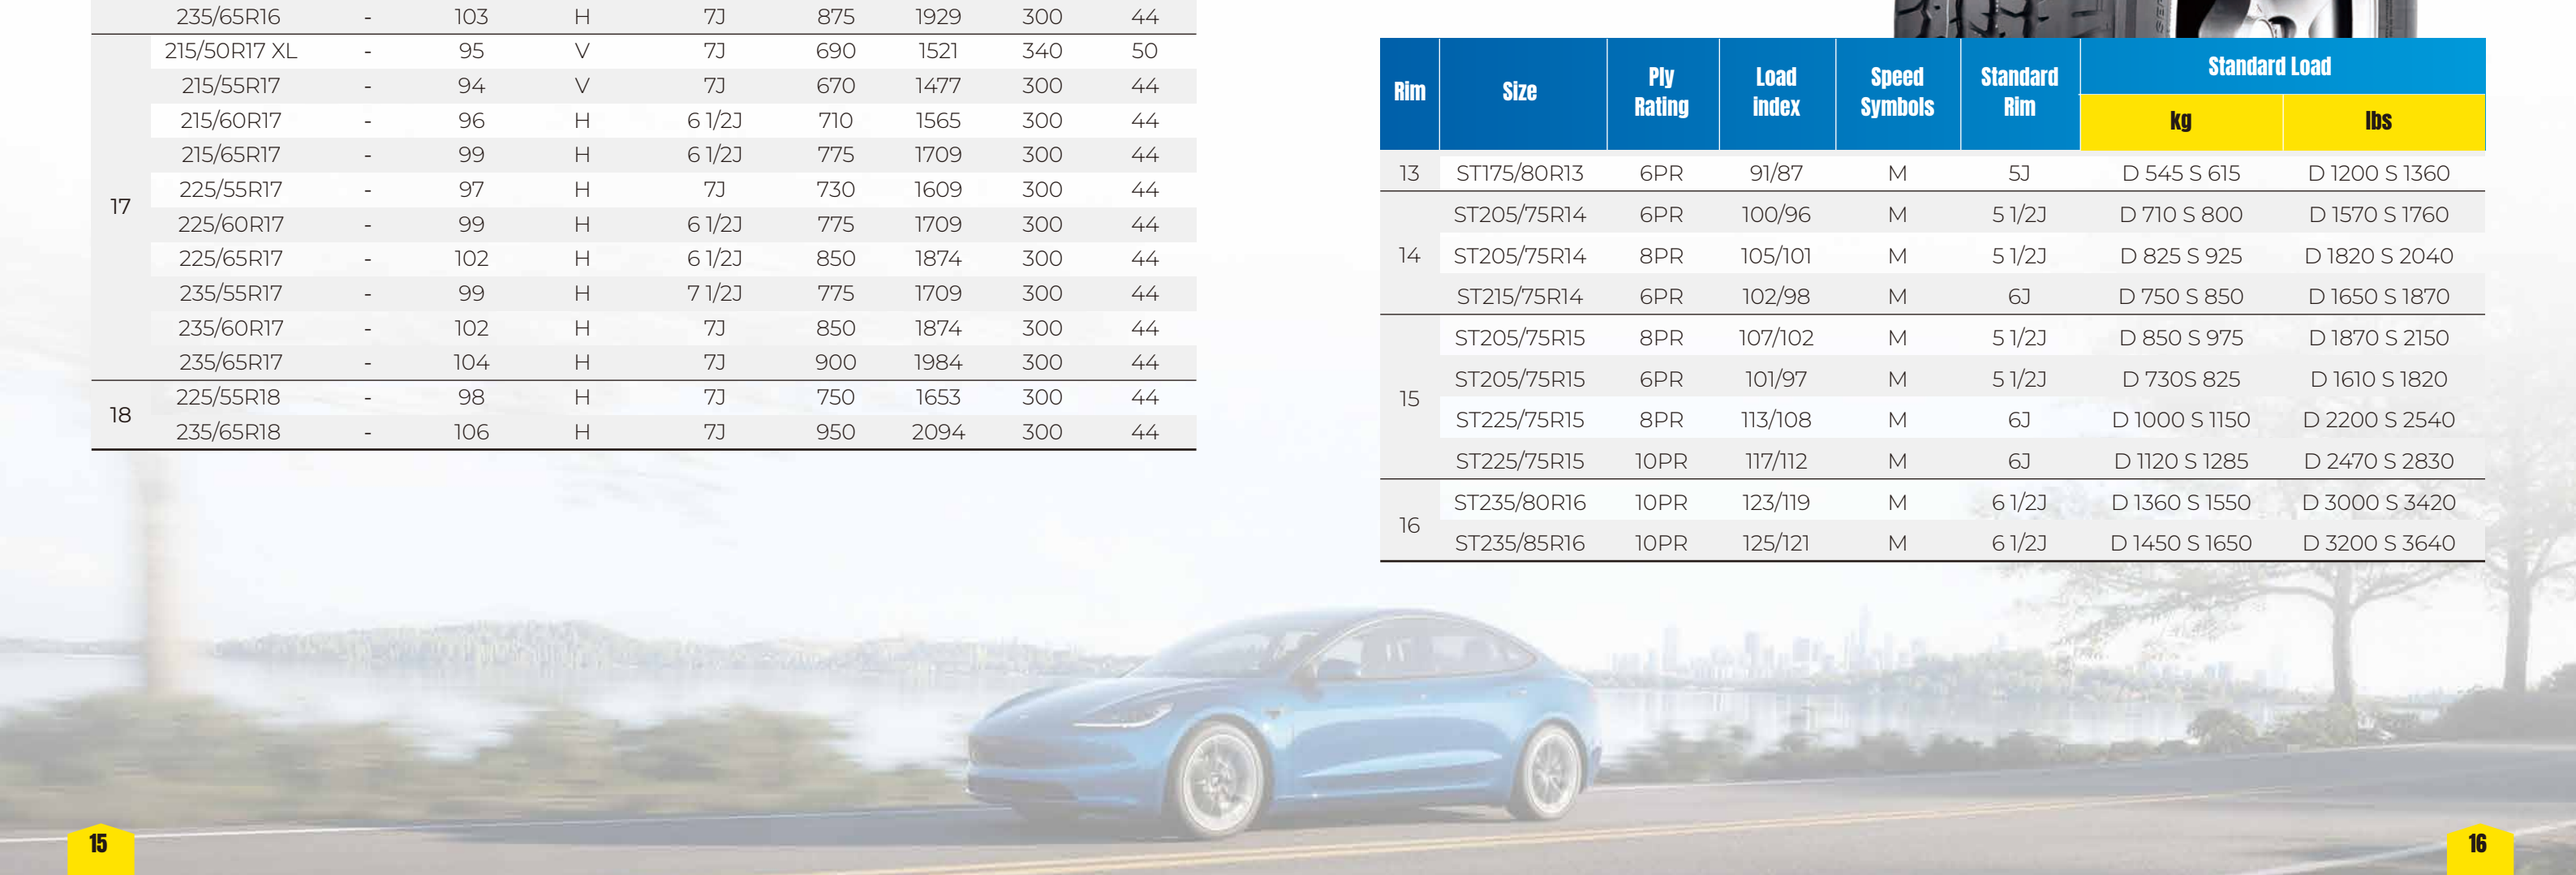

ALL SEASON
ALL WEATHER
(3PMSF)

LEAD SAFELY

www.leao-tire.com

LEAO TIRE



LION CLIMBER X/T | LION CLIMBER R/T | LION SPORT 4X4HP3 | LION SPORT H/T | LION SPORT A/T | LION SPORT M/T

SUV & LIGHT TRUCK

NEW LION CLIMBER X/T (3PMSF) 19
NEW LION CLIMBER R/T (3PMSF) 23
LION SPORT 4X4HP3 27
LION SPORT H/T 29
LION SPORT A/T 31
LION SPORT M/T 34

LION CLIMBER X/T NEW

Extreme All-Terrain Tire

FEATURES:



▸ OFF-ROAD DURABILITY

- Wide lateral grooves with stone ejectors help prevent stone retention
- Specially developed tread compound improves the resistance against cuts, chips and punctures in tough terrain



▸ ROBUSTNESS

- The aggressive 3D sidewall design provides extra sidewall protection on rugged terrain, especially against gravel and rocks, enhancing adaptability across a wide range of road conditions



▸ EXCELLENT WET & SNOW GRIP PERFORMANCE

- Interlocked tread blocks with advanced compound and zigzag siping design bring excellent grip in wet and snowy road conditions

▸ EXTRA PROTECTION

- The rim protector helps protect against accidental curb damage

TECHNICAL DATA


Rim Diameter: **16-22**

Section Width: **235-315**

Cross Section: **55-80**

Speed Symbol: **Q-T**

PERFORMANCE RATING

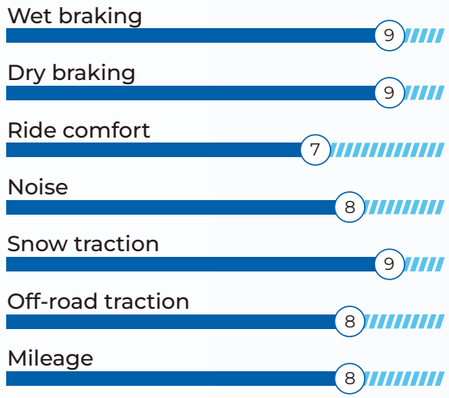

LION CLIMBER X/T NEW


BENEFITS:

POR · ROAD M+S · 3PMSF · MADE IN THAILAND

- For SUVs, CUVs, Light Trucks, and Pickups
- Reinforced protective structure provides excellent strength and durability
- Perfect grip on snowy surfaces
- Outstanding off-road traction
- 40% On-Road / 60% Off-Road
  Suitable for gravel, rock, sand, and mud



TEST RESULT

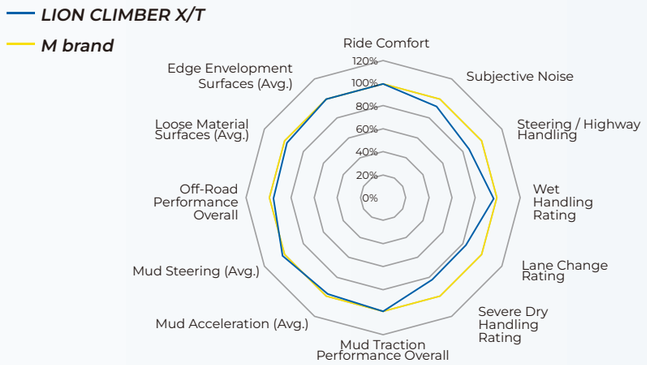


LION CLIMBER X/T

Extreme All-Terrain Tire

Rim	Size	Ply Rating	Load index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
16	265/75R16		116	T	7 1/2J	1250	2756	300	44
	LT245/75R16	10PR	120/116	Q	7J	S 1400 D 1260	S 3085 D 2778	550	80
	LT265/75R16	10PR	123/120	Q	7 1/2J	S 1550 D 1400	S 3415 D 3085	550	80
	LT285/75R16	10PR	126/123	Q	8J	S 1700 D 1550	S 3750 D 3415	550	80
17	265/70R17		115	T	8J	1215	2679	300	44
	LT235/80R17	10PR	120/117	Q	6 1/2J	S 1400 D 1285	S 3085 D 2835	550	80
	LT245/70R17	10PR	119/116	S	7J	S 1360 D 1250	S 3000 D 2755	550	80
	LT245/75R17	10PR	121/118	Q	7J	S 1450 D 1320	S 3195 D 2910	550	80
	LT265/70R17	10PR	123/120	Q	8J	S 1550 D 1400	S 3415 D 3085	550	80
	LT285/70R17	8PR	122/119	Q	8 1/2J	S 1500 D 1360	S 3305 D 3000	450	65
	35X12.50R17LT	10PR	125	R	10J	1650	3640	450	65
18	275/65R18	XL	116	T	8J	1250	2756	340	50
	LT265/70R18	10PR	124/121	Q	8J	S 1600 D 1450	S 3525 D 3195	550	80
	LT275/65R18	10PR	123/120	Q	8J	S 1550 D 1400	S 3415 D 3085	550	80
	LT275/70R18	10PR	125/122	Q	8J	S 1650 D 1500	S 3640 D 3305	550	80
	LT285/65R18	10PR	125/122	Q	8 1/2J	S 1650 D 1500	S 3640 D 3305	550	80
	33X12.50R18LT	12PR	122	R	10J	1500	3305	550	80
	35X12.50R18LT	10PR	123	R	10J	1550	3415	450	65
20	275/55R20	XL	117	T	8 1/2J	1285	2833	340	50
	275/60R20		115	R	8J	1215	2679	300	44
	LT265/60R20	10PR	121/118	Q	8J	S 1450 D 1320	S 3195 D 2910	550	80
	LT275/55R20	10PR	120/117	S	8 1/2J	S 1400 D 1285	S 3085 D 2835	550	80
	LT275/60R20	10PR	123/120	Q	8J	S 1550 D 1400	S 3415 D 3085	550	80
	LT275/65R20	10PR	126/123	Q	8J	S 1700 D 1550	S 3750 D 3415	550	80
	LT285/55R20	10PR	122/119	S	9J	S 1500 D 1360	S 3305 D 3000	550	80
	33X12.50R20LT	12PR	119	R	10J	1360	3000	550	80
	35X12.50R20LT	12PR	125	Q	10J	1650	3640	550	80
22	33X12.50R22LT	12PR	114	R	10 1/2J	1180	2600	550	80
	35X12.50R22LT	12PR	121	R	10J	1450	3195	550	80



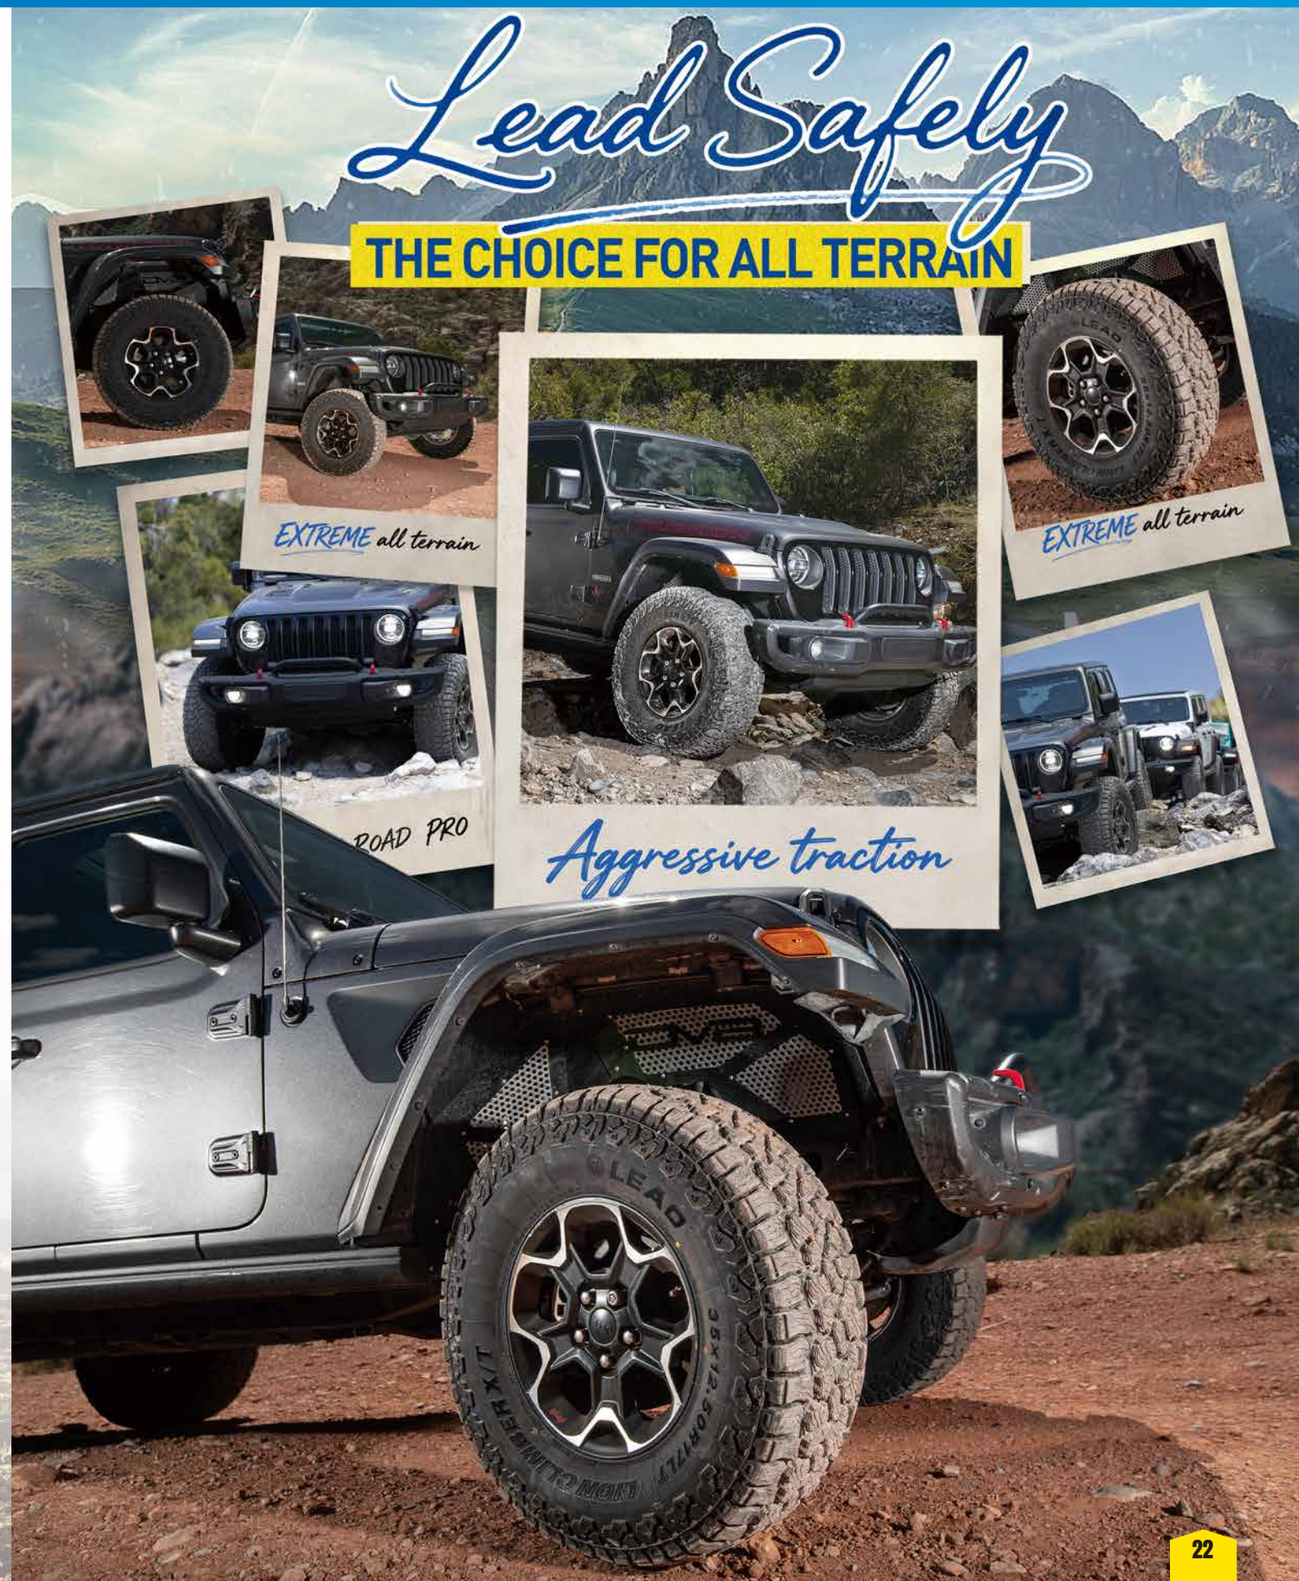

LION CLIMBER R/T NEW

Rugged Terrain Tire

FEATURES:



▸ OUTSTANDING OFF-ROAD TRACTION

- Diagonal symmetric blocks with biting edges quickly cut into mud and snow, thus deliver high traction in rugged terrain.
- Wide tread design increases contact patch on road surfaces, provides excellent grip and off-road traction.

▸ DURABILITY

- High strength carcass protects tread and sidewall from impacts and punctures in rough terrain and improves treadwear throughout the tire life.



▸ EXCELLENT WET & SNOW GRIP PERFORMANCE

- Interlocked tread blocks with advanced compound and zigzag siping design bring excellent grip in wet and snowy road conditions.

TECHNICAL DATA

Rim Diameter: **16-22**

Section Width: **265-345**

Cross Section: **55-80**

Speed Symbol: **Q-T**

PERFORMANCE RATING

Wet braking	9
Dry braking	9
Ride comfort	7
Noise	7
Snow traction	9
Off-road traction	9
Mileage	7

LION CLIMBER R/T NEW


BENEFITS:

POR · ROAD M+S · 3PMSF · MADE IN THAILAND

- For SUV/CUV, light truck and pickup
- Superior traction in rugged terrain and all seasons
- Excellent snow performance
- Durability
- 25% paved road + 75% off-road including types of gravel/ rock/ sand/ mud



TEST RESULT

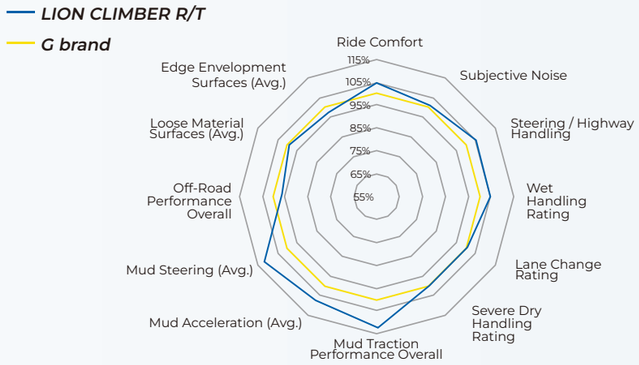


LION CLIMBER R/T

Rugged Terrain Tire

Rim	Size	Ply Rating	Load index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
16	LT265/75R16	10PR	123/120	Q	7 1/2J	S 1550 D 1400	S 3415 D 3085	550	80
	LT285/75R16	10PR	126/123	Q	8J	S 1700 D 1550	S 3750 D 3415	550	80
17	265/70R17	/	115	T	8J	1215	2679	300	44
	33X12.50R17LT	10PR	120	Q	10J	1400	3085	450	65
	35X12.50R17LT	12PR	128	Q	10J	1800	3970	550	80
	37X12.50R17LT	12PR	128	Q	10J	1800	3970	550	80
	LT265/70R17	10PR	123/120	Q	8J	S 1550 D 1400	S 3415 D 3085	550	80
	LT285/70R17	10PR	126/123	Q	8 1/2J	S 1700 D 1550	S 3750 D 3415	550	80
18	275/65R18	/	116	T	8J	1250	2756	300	44
	33X12.50R18LT	12PR	122	Q	10J	1500	3305	550	80
	35X12.50R18LT	12PR	128	Q	10J	1800	3970	550	80
	37X12.50R18LT	12PR	128	Q	10J	1800	3970	550	80
	LT275/65R18	10PR	123/120	Q	8J	S 1550 D 1400	S 3415 D 3085	550	80
	LT275/70R18	10PR	125/122	Q	8J	S 1650 D 1500	S 3640 D 3305	550	80
20	275/55R20	XL	117	T	8 1/2J	1285	2833	340	50
	275/60R20	XL	116	T	8J	1250	2756	340	50
	33X12.50R20LT	12PR	119	Q	10J	1360	3000	550	80
	35X12.50R20LT	12PR	125	Q	10J	1650	3640	550	80
	35X13.50R20LT	12PR	126	Q	11J	1700	3750	550	80
	37X12.50R20LT	12PR	128	Q	10J	1800	3970	550	80
	LT275/55R20	10PR	120/117	Q	8 1/2J	S 1400 D 1285	S 3085 D 2835	550	80
	LT275/65R20	10PR	126/123	Q	8J	S 1700 D 1550	S 3750 D 3415	550	80
	LT285/55R20	10PR	122/119	S	9J	S 1500 D 1360	S 3305 D 3000	550	80
	LT285/60R20	10PR	125/122	Q	8 1/2J	S 1650 D 1500	S 3640 D 3305	550	80
	LT305/55R20	12PR	125/122	Q	9 1/2J	S 1650 D 1500	S 3640 D 3305	550	80
22	33X12.50R22LT	12PR	114	Q	10 1/2J	1180	2600	550	80
	35X12.50R22LT	12PR	121	Q	10J	1450	3195	550	80
	37X12.50R22LT	12PR	127	Q	10J	1750	3860	550	80
	37X13.50R22LT	12PR	128	Q	11J	1800	3970	550	80



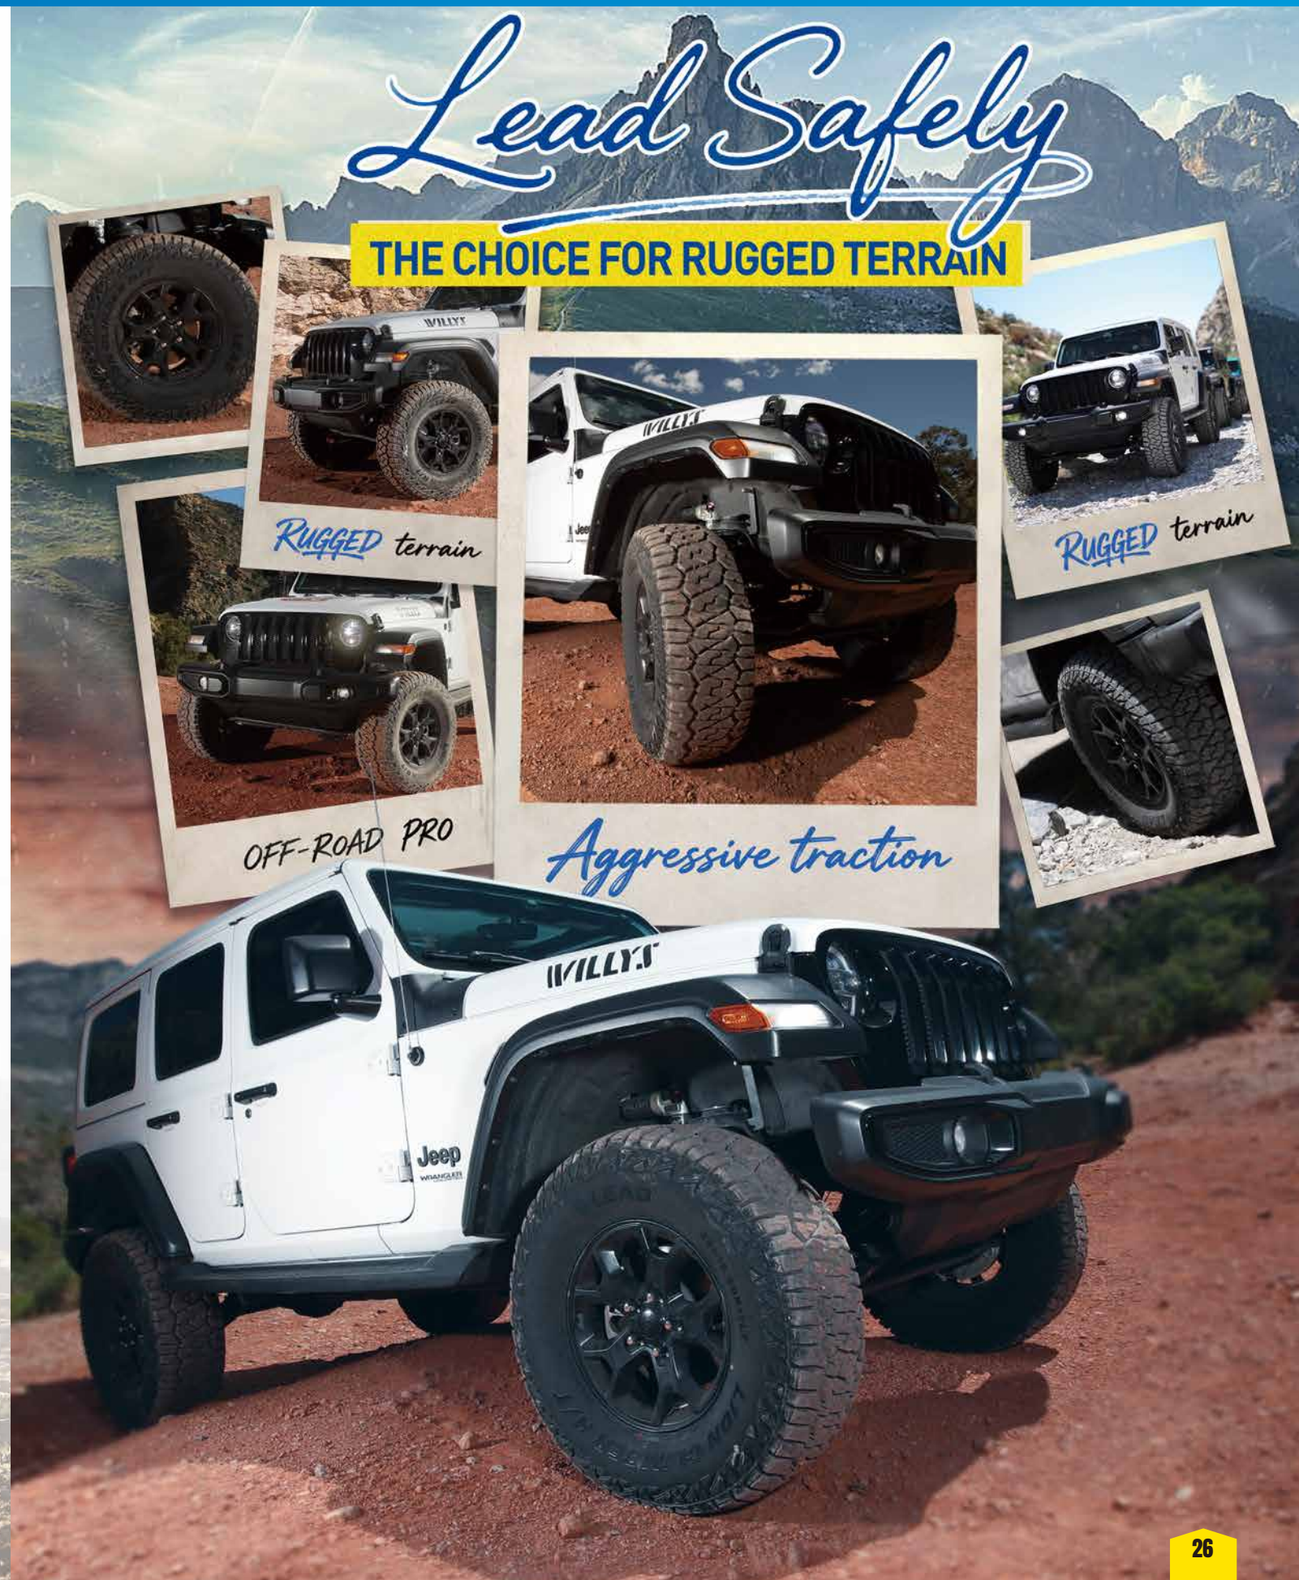

LION SPORT 4X4 HP3

SUV Ultra-High Performance Tire

Comfortable Ride / Low Noise

- Improved ride comfort
- Reduced fuel consumption
- Enhanced safety

MADE IN THAILAND



Rim	Size	Ply Rating	Load index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
15	235/70R15 XL	-	106	H	7J	950	2094	340	50
16	205/70R16	-	97	V	6J	730	1609	300	44
	215/65R16 XL	-	102	H	6 1/2J	850	1874	340	50
	215/70R16	-	100	H	6 1/2J	800	1764	300	44
	225/75R16	-	104	H	6J	900	1984	300	44
	235/70R16	-	106	H	7J	950	2094	300	44
	245/70R16 XL	-	111	H	7J	1090	2403	340	50
	265/70R16	-	112	H	8J	1120	2469	300	44
	275/70R16	-	114	H	8J	1180	2601	300	44
17	225/55R17 XL	-	101	V	7J	825	1819	340	50
	225/60R17	-	99	H	6 1/2J	775	1709	300	44
	225/65R17	-	102	H	6 1/2J	850	1874	300	44
	235/55R17 XL	-	103	W	7 1/2J	875	1929	340	50
	235/60R17 XL	-	106	V	7J	950	2094	340	50
	235/65R17 XL	-	108	V	7J	1000	2205	340	50
	235/70R17 XL	-	109	T	7J	1030	2271	340	50

LION SPORT 4x4 HP3

SUV Ultra-High Performance Tire

Rim	Size	Ply Rating	Load index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
17	245/65R17 XL	-	111	H	7J	1090	2403	340	50
	255/60R17	-	106	H	7 1/2J	950	2094	300	44
	255/65R17	-	110	H	7 1/2J	1060	2337	300	44
	255/70R17	-	112	T	7 1/2J	1120	2469	300	44
	265/65R17	-	112	H	8J	1120	2469	300	44
18	225/60R18	-	100	H	6 1/2J	800	1764	300	44
	235/55R18 XL	-	104	V	7 1/2J	900	1984	340	50
	235/60R18 XL	-	107	W	7J	975	2149	340	50
	235/65R18	-	106	H	7J	950	2094	340	50
	245/60R18	-	105	V	7J	925	2039	300	44
	255/55R18 XL	-	109	V	8J	1030	2271	340	50
	255/60R18 XL	-	112	V	7 1/2J	1120	2469	340	50
	255/65R18	-	111	H	7 1/2J	1090	2403	300	44
	255/70R18	-	113	T	7 1/2J	1150	2535	300	44
	265/60R18	-	110	H	8J	1060	2337	300	44
	265/65R18	-	114	H	8J	1180	2601	300	44
	265/70R18	-	116	T	8J	1250	2756	300	44
	275/65R18	-	116	H	8J	1250	2756	300	44
19	245/55R19	-	103	V	7 1/2J	875	1929	300	44
	255/50R19 XL	-	107	W	8J	975	2149	340	50
	255/55R19 XL	-	111	V	8J	1090	2403	340	50
	255/60R19	-	109	H	7 1/2J	1030	2271	300	44
20	245/50R20	-	102	V	7 1/2J	850	1874	300	44
	255/50R20 XL	-	109	V	8J	1030	2271	340	50
	265/50R20 XL	-	111	V	8 1/2J	1090	2403	340	50
	275/60R20	-	115	T	8J	1215	2679	300	44

LION SPORT H/T

Highway Terrain Tire

SUV Tire (Urban Use)
Low Noise and Good Dry and Wet Performance

MADE IN THAILAND

- High drainage capability
- High comfort and low noise
- Excellent handling performance



Rim	Size	Ply Rating	Load index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
15	235/75R15 XL	-	109	T	6 1/2J	1030	2271	340	50
	255/70R15	-	108	T	7 1/2J	1000	2205	300	44
	265/70R15	-	112	T	8J	1120	2469	300	44
	31X10.50R15LT	6PR	109	R	8 1/2J	1030	2270	350	50
16	215/70R16	-	100	T	6 1/2J	800	1764	300	44
	225/70R16 XL	-	107	T	6 1/2J	975	2149	340	50
	235/70R16 XL	-	109	T	7J	1030	2271	340	50
	245/70R16	-	107	T	7J	975	2149	300	44
	245/70R16 XL	-	111	T	7J	1090	2403	340	50
	245/75R16	-	111	T	7J	1090	2403	300	44
	255/70R16	-	111	T	7 1/2J	1090	2403	300	44
	265/70R16	-	112	T	8J	1120	2469	300	44
	265/75R16	-	116	T	7 1/2J	1250	2756	300	44
	LT215/85R16	10PR	115/112	Q	6J	D 1120 S 1215	D 2470 S 2680	550	80

LION SPORT H/T

Highway Terrain Tire

Rim	Size	Ply Rating	Load index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
16	LT225/75R16	10PR	115/112	Q	6J	D 1120 S 1215	D 2470 S 2680	550	80
	LT245/75R16	10PR	120/116	R	7J	D 1260 S 1380	D 2778 S 3042	550	80
	LT265/75R16	10PR	123/120	R	7 1/2J	D 1400 S 1550	D 3085 S 3415	550	80
	LT235/85R16	10PR	120/116	R	6 1/2J	D 1260 S 1380	D 2778 S 3042	550	80
17	235/65R17	-	104	T	7J	900	1984	300	44
	245/65R17	-	107	T	7J	975	2149	300	44
	245/70R17	-	110	T	7J	1060	2337	300	44
	265/65R17	-	112	H	8J	1120	2469	300	44
	265/70R17	-	115	T	8J	1215	2679	300	44
	275/65R17 XL	-	119	H	8J	1360	3000	340	50
	285/65R17	-	116	S	8 1/2J	1250	2756	300	44
	LT265/70R17	10PR	121/118	R	8J	D 1320 S 1450	D 2910 S 3195	550	80
18	LT265/70R18	10PR	124/121	R	8J	D 1450 S 1600	D 3195 S 3525	550	80
20	275/55R20 XL	-	117	V	8 1/2J	1285	2833	340	50
	265/50R20 XL	-	111	V	8 1/2J	1090	2403	340	50
	265/50R20 XL	-	112	V	8 1/2J	1120	2469	340	50



LION SPORT A/T

All-Terrain Tire

High Wear Resistance

Excellent wet performance

Large-angle grooves improve self-cleaning ability

An optimal balance between on-road and off-road performance

MADE IN THAILAND



Rim	Size	Ply Rating	Load index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
15	235/75R15 XL		109	T	6 1/2J	1030	2271	340	50
	235/75R15 XL		109	Q	6 1/2J	1030	2271	340	50
	265/70R15 OWL		112	T	8J	1120	2469	300	44
	265/70R15 OWL		112	Q	8J	1120	2469	300	44
	LT215/75R15	6PR	100/97	S	6J	D 730 S 800	D 1610 S 1765	350	50
	LT235/75R15	6PR	104/101	R	6 1/2J	D 825 S 900	D 1820 S 1985	350	50
	LT235/75R15	6PR	104/101	Q	6 1/2J	D 825 S 900	D 1820 S 1985	350	50
	30X9.50R15LT	6PR	104	S	7 1/2J	900	1985	350	51
	30X9.50R15LT	6PR	104	Q	7 1/2J	900	1985	350	51
	31X10.50R15LT	6PR	109	R	8 1/2J	1030	2270	350	51
	31X10.50R15LT	6PR	109	Q	8 1/2J	1030	2270	350	51
16	235/70R16		106	T	7J	950	2094	300	44
	235/70R16		106	Q	7J	950	2094	300	44
	245/70R16 XL		111	T	7J	1090	2403	340	50
	245/70R16 XL		111	Q	7J	1090	2403	340	50

LION SPORT A/T

All-Terrain Tire

Rim	Size	Ply Rating	Load index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
16	245/75R16		111	T	7J	1090	2403	300	44
	255/70R16		111	S	7 1/2J	1090	2403	300	44
	265/70R16		112	T	8J	1120	2469	300	44
	265/70R16		112	Q	8J	1120	2469	300	44
	265/75R16		116	T	7 1/2J	1250	2756	300	44
	205R16LT	8PR	110/108	T	6J	D 1000 S 1060	D 2205 S 2337	450	65
	205R16LT	8PR	110/108	Q	6J	D 1000 S 1060	D 2205 S 2337	450	65
	LT215/85R16	10PR	115/112	Q	6J	D 1120 S 1215	D 2470 S 2680	550	80
	LT225/75R16	10PR	115/112	Q	6J	D 1120 S 1215	D 2470 S 2680	550	80
	LT235/85R16	10PR	120/116	Q	6 1/2J	D 1260 S 1380	D 2778 S 3042	550	80
	LT245/75R16	10PR	120/116	Q	7J	D 1260 S 1380	D 2778 S 3042	550	80
	LT245/75R16 OWL	10PR	120/116	Q	7J	D 1260 S 1380	D 2778 S 3042	550	80
	LT265/75R16	8PR	119/116	Q	7 1/2J	D 1250 S 1360	D 2755 S 3000	450	65
	LT265/75R16 OWL	8PR	119/116	Q	7 1/2J	D 1250 S 1360	D 2755 S 3000	450	65
	LT265/75R16	10PR	123/120	R	7 1/2J	D 1400 S 1550	D 3085 S 3415	550	80
	LT285/75R16	6PR	116/113	Q	8J	D 1150 S 1250	D 2535 S 2755	350	51
	LT285/75R16	10PR	126/123	R	8J	D 1550 S 1700	D 3415 S 3750	550	80
	LT305/70R16	10PR	124/121	R	9J	D 1450 S 1600	D 3195 S 3525	450	65
17	245/65R17 XL		111	T	7J	1090	2403	340	50
	245/65R17 XL		111	Q	7J	1090	2403	340	50
	245/70R17		110	S	7J	1060	2337	300	44
	265/65R17		112	T	8J	1120	2469	300	44
	265/70R17		115	T	8J	1215	2679	300	44
	265/70R17		115	Q	8J	1215	2679	300	44
	P285/70R17		117	T	8 1/2J	1285	2833	300	44
	LT235/80R17	10PR	120/117	R	6 1/2J	D 1285 S 1400	D 2835 S 3085	550	80
	LT235/80R17	10PR	120/117	Q	6 1/2J	D 1285 S 1400	D 2835 S 3085	550	80
	LT245/70R17	10PR	119/116	Q	7J	D 1250 S 1360	D 2755 S 3000	550	80
	LT245/75R17	10PR	121/118	R	7J	D 1320 S 1450	D 2910 S 3195	550	80

LION SPORT A/T

All Terrain Tire

Rim	Size	Ply Rating	Load index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
17	LT245/75R17	10PR	121/118	Q	7J	D 1320 S 1450	D 2910 S 3195	550	80
	LT265/70R17	10PR	121/118	R	8J	D 1320 S 1450	D 2910 S 3195	550	80
	LT265/70R17	10PR	121/118	Q	8J	D 1320 S 1450	D 2910 S 3195	550	80
	LT285/70R17	8PR	121/118	S	8 1/2J	D 1320 S 1450	D 2910 S 3195	450	65
	LT285/70R17	8PR	121/118	Q	8 1/2J	D 1320 S 1450	D 2910 S 3195	450	65
	LT285/70R17	10PR	121/118	S	8 1/2J	D 1320 S 1450	D 2910 S 3195	550	80
	LT305/70R17	8PR	119/116	R	9J	D 1250 S 1360	D 2755 S 3000	350	50
	LT305/70R17	8PR	119/116	Q	9J	D 1250 S 1360	D 2755 S 3000	350	50
	LT305/70R17	10PR	121/118	S	9J	D 1320 S 1450	D 2910 S 3195	450	65
18	255/70R18		113	S	7 1/2J	1150	2535	300	44
	265/60R18		110	T	8J	1060	2337	300	44
	265/70R18		116	T	8J	1250	2756	300	44
	275/65R18		116	T	8J	1250	2756	300	44
	LT265/65R18	10PR	122/119	Q	8J	D 1360 S 1500	D 3000 S 3305	550	80
	LT265/70R18	10PR	124/121	S	8J	D 1450 S 1600	D 3195 S 3525	550	80
	LT275/65R18	10PR	123/120	S	8J	D 1400 S 1550	D 3085 S 3415	550	80
	LT275/70R18	10PR	125/122	S	8J	D 1500 S 1650	D 3305 S 3640	550	80
	LT305/60R18	10PR	121/118	R	9J	D 1320 S 1450	D 2910 S 3195	450	65
20	275/55R20		113	S	8 1/2J	1150	2535	300	44
	275/60R20		115	T	8J	1215	2679	300	44
	LT265/60R20	10PR	121/118	R	8J	D 1320 S 1450	D 2910 S 3195	550	80
	LT265/60R20	10PR	121/118	Q	8J	D 1320 S 1450	D 2910 S 3195	550	80
	LT275/55R20	10PR	120/117	Q	8 1/2J	D 1285 S 1400	D 2835 S 3085	550	80
	LT275/60R20	10PR	123/120	Q	8J	D 1400 S 1550	D 3085 S 3415	550	80
	LT275/65R20	10PR	126/123	S	8J	D 1550 S 1700	D 3415 S 3750	550	80
	LT285/55R20	10PR	122/119	S	9J	D 1360 S 1500	D 3000 S 3305	550	80
	LT285/65R20	10PR	127/124	S	8 1/2J	D 1600 S 1750	D 3525 S 3860	550	80
	LT305/55R20	10PR	121/118	R	9 1/2J	D 1320 S 1450	D 2910 S 3195	450	65
	35X12.50R20LT	10PR	121	Q	10J	1450	3195	450	65

LION SPORT M/T

POR
ROAD M+S

Mud Terrain Tire ◀ **For SUV and Off-Road Use**

- Stone ejector and mud cleaning performance
- Improved on-road driving performance
- Enhanced wear performance, high mileage
- Excellent off-road traction and grip



Rim	Size	Ply Rating	Load index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
15	265/70R15 OWL		112	T	8J	1120	2469	300	44
	265/75R15 OWL		112	Q	7 1/2J	1120	2469	300	44
	30X9.50R15LT OWL	6PR	104	Q	7 1/2J	900	1985	350	51
	31X10.50R15LT OWL	6PR	109	Q	8 1/2J	1030	2270	350	51
	33X12.50R15LT OWL	6PR	108	Q	10J	1000	2205	250	36
	35X12.50R15LT	6PR	113	Q	10J	1150	2535	250	35
	LT215/75R15 OWL	6PR	100/97	Q	6J	D 730 S 800	D 1610 S 1765	350	51
	LT235/75R15 OWL	6PR	104/101	Q	6 1/2J	D 825 S 900	D 1820 S 1985	350	51
16	LT245/75R16 OWL	10PR	120/116	Q	7J	D 1260 S 1380	D 2778 S 3042	550	80
	LT255/70R16 OWL	8PR	115/112	Q	7 1/2J	D 1120 S 1215	D 2470 S 2680	450	65
	LT265/70R16 OWL	6PR	110/107	Q	8J	D 975 S 1060	D 2150 S 2335	350	51
	LT265/75R16 OWL	8PR	119/116	Q	7 1/2J	D 1250 S 1360	D 2755 S 3000	450	65
	LT265/75R16 OWL	10PR	123/120	Q	7 1/2J	D 1400 S 1550	D 3085 S 3415	550	80
	LT285/75R16 OWL	10PR	126/123	Q	8J	D 1550 S 1700	D 3415 S 3750	550	80
	LT305/70R16 OWL	10PR	124/121	Q	9J	D 1450 S 1600	D 3195 S 3525	450	65

LION SPORT M/T

Mud Terrain Tire

Rim	Size	Ply Rating	Load index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
16	LT265/75R16 OWL	10PR	123/120	Q	7 1/2J	D 1400 S 1550	D 3085 S 3415	550	80
	LT285/75R16 OWL	10PR	126/123	Q	8J	D 1550 S 1700	D 3415 S 3750	550	80
	LT305/70R16 OWL	10PR	124/121	Q	9J	D 1450 S 1600	D 3195 S 3525	450	65
	LT315/75R16 OWL	10PR	127/124	Q	8 1/2J	D 1600 S 1750	D 3525 S 3860	450	65
	LT375/65R16	8PR	126/123	Q	11J	D 1550 S 1700	D 3415 S 3750	350	50
17	33X12.50R17LT	10PR	120	Q	10J	1400	3085	450	65
	35X12.50R17LT OWL	10PR	121	Q	10J	1450	3195	450	65
	37X12.50R17LT	8PR	124	Q	10J	1600	3525	350	50
	37X13.50R17LT	10PR	121	Q	11J	1450	3195	450	65
	40X13.50R17LT	6PR	121	Q	11J	1450	3195	250	35
	LT235/80R17 OWL	10PR	120/117	Q	6 1/2J	D 1285 S 1400	D 2835 S 3085	550	80
	LT265/65R17 OWL	10PR	120/117	Q	8J	D 1285 S 1400	D 2835 S 3085	550	80
	LT265/70R17 OWL	10PR	121/118	Q	8J	D 1320 S 1450	D 2910 S 3195	550	80
	LT285/70R17 OWL	10PR	121/118	Q	8 1/2J	D 1320 S 1450	D 2910 S 3195	550	80
	LT295/70R17	10PR	121/118	Q	8 1/2J	D 1320 S 1450	D 2910 S 3195	550	80
	LT305/65R17	10PR	121/118	Q	9J	D 1320 S 1450	D 2910 S 3195	450	65
	LT305/70R17 OWL	8PR	119/116	Q	9J	D 1250 S 1360	D 2755 S 3000	350	51
	LT315/70R17	10PR	121/118	Q	9 1/2J	D 1320 S 1450	D 2910 S 3195	450	65
18	33X12.50R18LT OWL	10PR	118	Q	10J	1320	2910	450	65
	33X12.50R18LT OWL	12PR	122	Q	10J	1500	3305	550	80
	35X12.50R18LT OWL	10PR	123	Q	10J	1550	3415	450	65
	35X12.50R18LT OWL	12PR	128	Q	10J	1800	3970	550	80
	37X13.50R18LT	8PR	124	Q	11J	1600	3525	350	50
	LT265/60R18 OWL	10PR	119/116	Q	8J	D 1250 S 1360	D 2755 S 3000	550	80
	LT275/70R18	8PR	121/118	Q	8J	D 1320 S 1450	D 2910 S 3195	450	65
	LT275/70R18 OWL	10PR	125/122	Q	8J	D 1500 S 1650	D 3305 S 3640	550	80

LION SPORT M/T

Mud Terrain Tire

Rim	Size	Ply Rating	Load index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
18	LT295/70R18	10PR	129/126	Q	8 1/2J	D 1700 S 1850	D 3750 S 4080	550	80
	LT305/60R18	10PR	121/118	Q	9J	D 1320 S 1450	D 2910 S 3195	450	65
	LT305/70R18	10PR	126/123	Q	9J	D 1550 S 1700	D 3415 S 3750	450	65
20	33X12.50R20LT OWL	10PR	114	Q	10J	1180	2600	450	65
	33X12.50R20LT OWL	12PR	119	Q	10J	1360	3000	550	80
	36X15.50R20LT	10PR	126	Q	12 1/2J	1700	3750	450	65
	37X13.50R20LT	10PR	127	Q	11J	1750	3860	450	65
	35X12.50R20LT OWL	10PR	121	Q	10J	1450	3195	450	65
	35X12.50R20LT OWL	12PR	125	Q	10J	1650	3640	550	80
	38X15.50R20LT OWL	8PR	125	Q	12 1/2J	1650	3640	350	51
	40X14.50R20LT	8PR	128	Q	11 1/2J	1800	3970	350	50
	LT285/55R20 OWL	10PR	122/119	Q	9J	D 1360 S 1500	D 3000 S 3305	550	80
	LT285/65R20 OWL	10PR	127/124	Q	8 1/2J	D 1600 S 1750	D 3525 S 3860	550	80
	LT295/60R20	10PR	126/123	Q	8 1/2J	D 1550 S 1700	D 3415 S 3750	550	80
	LT305/55R20	10PR	121/118	Q	9 1/2J	D 1320 S 1450	D 2910 S 3195	450	65
22	33X12.50R22LT	10PR	109	Q	10J	1030	2270	450	65
	33X12.50R22LT	12PR	114	Q	10J	1180	2600	550	80
	35X12.50R22LT OWL	10PR	117	Q	10J	1285	2835	450	65
	35X12.50R22LT OWL	12PR	121	Q	10J	1450	3195	550	80
	37X13.50R22LT	10PR	123	Q	11J	1550	3415	450	65
	37X13.50R22LT	12PR	128	Q	11J	1800	3970	550	80
24	37X13.50R24LT	10PR	120	Q	11J	1400	3085	450	65
26	37X13.50R26LT	10PR	114	Q	11J	1180	2600	450	65

WINTER



LEAD SAFELY

www.leao-tire.com

LEAO TIRE



I-17

I-17

Tire designed for passenger cars in ice and snow conditions

PCR / SUV HP & UHP

- Outstanding grip and traction performance on ice and snow surfaces with a directional tread pattern design
- Directional grooves help evacuate snow and mud
- Specially designed suction and drainage grooves quickly break through the water film
- Complex soft tread compound and 3D sipes technology promote handling performance in ice and snow conditions



Rim	Size	Ply Rating	Load index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
13	165/70R13	-	79	Q	5J	437	963	300	44
	175/70R13	-	82	Q	5J	475	1047	300	44
14	165/60R14	-	75	Q	5J	387	853	300	44
	165/70R14	-	81	Q	5J	462	1019	300	44
	175/65R14	-	82	Q	5J	475	1047	300	44
	175/70R14	-	84	Q	5J	500	1120	300	44
	185/60R14	-	82	Q	5 1/2J	475	1047	300	44
	185/65R14	-	86	Q	5 1/2J	530	1168	300	44
	185/70R14	-	88	Q	5 1/2J	560	1235	300	44
15	175/65R15	-	84	Q	5J	500	1102	300	44
	185/55R15	-	82	S	6J	475	1047	300	44
	185/60R15	-	84	Q	5 1/2J	500	1102	300	44
	185/65R15	-	88	Q	5 1/2J	560	1235	300	44
	195/50R15	-	82	S	6J	475	1047	300	44
	195/55R15	-	85	S	6J	515	1135	300	44

I-17

PCR / SUV HP & UHP

Rim	Size	Ply Rating	Load index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
15	195/60R15	-	88	Q	6J	560	1235	300	44
	195/65R15	-	91	Q	6J	615	1356	300	44
	205/65R15	-	94	Q	6J	670	1477	300	44
	205/70R15	-	96	Q	6J	710	1565	300	44
16	195/55R16 XL	-	91	S	6J	615	1356	340	50
	205/55R16 XL	-	94	Q	6 1/2J	670	1477	340	50
	205/60R16 XL	-	96	Q	6J	710	1565	340	50
	215/55R16	-	93	Q	7J	650	1433	300	44
	215/60R16	-	95	Q	6 1/2J	690	1521	300	44
	215/65R16	-	98	Q	6 1/2J	750	1653	300	44
	225/55R16	-	95	S	7J	690	1521	300	44
	225/60R16	-	98	S	6 1/2J	750	1653	300	44
	235/70R16	-	106	Q	7J	950	2094	300	44
17	205/45R17 XL	-	88	S	7J	560	1235	340	50
	205/50R17 XL	-	93	S	6 1/2J	650	1433	340	50
	215/45R17 XL	-	91	S	7J	615	1356	340	50
	215/50R17 XL	-	95	S	7J	690	1521	340	50
	215/55R17	-	94	S	7J	670	1477	300	44
	215/60R17	-	96	S	6 1/2J	710	1565	300	44
	225/45R17 XL	-	94	S	7 1/2J	670	1477	340	50
	225/50R17	-	94	S	7J	670	1477	300	44
	225/55R17	-	97	S	7J	730	1609	300	44
	225/60R17	-	99	Q	6 1/2J	775	1709	300	44
	225/65R17	-	102	Q	6 1/2J	850	1874	300	44
	235/55R17	-	99	S	7 1/2J	775	1709	300	44
	235/65R17	-	104	Q	7J	900	1984	300	44
	245/65R17	-	107	Q	7J	975	2149	300	44
	255/60R17	-	106	Q	7 1/2J	950	2094	300	44
	265/65R17	-	112	Q	8J	1120	2469	300	44

I-17

PCR / SUV HP & UHP

Rim	Size	Ply Rating	Load index	Speed Symbols	Standard Rim	Standard Load		Max Pressure	
						kg	lbs	kPa	psi
17	275/65R17	-	115	Q	8J	1215	2679	300	44
18	225/40R18 XL	-	92	S	8J	630	1389	340	50
	225/45R18 XL	-	95	S	7 1/2J	690	1521	340	50
	225/55R18	-	98	Q	7J	750	1653	300	44
	225/60R18	-	100	Q	6 1/2J	800	1764	300	44
	235/45R18	-	94	S	8J	670	1477	300	44
	235/50R18	-	97	Q	7 1/2J	730	1609	300	44
	235/55R18	-	100	S	7 1/2J	800	1764	300	44
	235/60R18	-	103	S	7J	875	1929	300	44
	245/40R18	-	93	S	8 1/2J	650	1433	300	44
	245/45R18	-	96	S	8J	710	1565	300	44
	245/50R18	-	100	Q	7 1/2J	800	1764	300	44
	245/60R18	-	105	Q	7J	925	2039	300	44
	255/40R18	-	95	Q	9J	690	1521	300	44
	255/55R18	-	105	Q	8J	925	2039	300	44
	255/60R18 XL	-	112	Q	7 1/2J	1120	2469	340	50
	285/60R18	-	116	Q	8 1/2J	1250	2756	300	44
19	235/50R19	-	99	S	7 1/2J	775	1709	300	44

LEAD SAFELY

www.leao-tire.com

LEAO TIRE

Replacement Market Tires Warranty Manual

Warranty Eligibility

This Limited Warranty applies to all qualified replacement-market passenger and light truck tires manufactured by Shandong Linglong Tyre Co., Ltd. and its subsidiaries. This Limited Warranty applies only to the original purchaser and only to tires bearing a complete brand identification and a valid DOT code or barcode. This Limited Warranty is valid only if all of the following conditions are met:

- The tires were manufactured on or after January 1, 2025, and were shipped to North America for sale and use.
- The tire fails due to the workmanship or materials.
- The tire is within the applicable warranty period, and the remaining tread depth is above the Tread Wear Indicator (TWI).

What is warranted and for how long

If a tire covered by this Limited Warranty becomes unserviceable due to a defect in workmanship or materials while the remaining tread depth is above the Tread Wear Indicator (TWI), Linglong will provide warranty coverage in accordance with the terms and conditions of this Limited Warranty.

- The warranty period is six (6) years from the date of purchase or seven (7) years from the date of manufacture, whichever comes first, provided the remaining tread depth is above the Tread Wear Indicator (TWI).
- If the tire fails due to manufacturing reasons & meets the warranty scope & conditions, the remaining pattern depth exceeds TWI, the new tire of the same specification will be covered free of charge.

What is not covered

1. Road hazard damage caused by obstacles or debris, including cuts, punctures (whether repairable or not), snags, bruises, tears, abrasions, or impact breaks.
2. Improper or failed repairs.
3. Damage resulting from improper inflation or improper maintenance.
4. Damage caused by improper mounting or dismounting.
5. Mechanical irregularities such as bent wheel assemblies, misalignment worn or faulty components.
6. Damage caused by overinflation, underinflation, overloading, or defective vehicle mechanical conditions.
7. Damage from over-inflation or under-inflation, overloading, defective vehicle mechanical conditions.
8. Non-racing or off-road tires that have been misused or abused in racing or off-road applications.
9. Damage caused by ozone or weather cracking, misuse, abuse, tire modifications, or operation while flat (run-flat damage).
10. Any tire from which the DOT identification number and/or brand name has been intentionally removed.
11. Tires that have been modified after leaving the factory, including the addition of fillers, sealants, balancing compounds, or external tire treatments. If any added material is determined to have caused the failure, the tire will not be eligible for warranty coverage.
12. Abnormal tread wear resulting from improper installation, wheel misalignment, tire/wheel assembly imbalance, etc.
13. Vehicles or tires operated beyond their rated load capacity.
14. Additional monetary loss, such as damage of the vehicle or time, etc.

Road Hazard Warranty

If a tire becomes unserviceable due to a non-repairable road hazard, it must meet the following eligibility requirements:

- The tire must be within one (1) year of the date of purchase. The original proof of purchase must be provided.
- For eligible tires, compensation will be equal to 50% of the total FOB tire price plus freight.

Treadwear Mileage Warranty

If an eligible tire wears evenly to the Tread Wear Indicator (TWI) before reaching the warranted mileage, under normal passenger vehicle use and within the applicable Limited Warranty period. The unused service will be subsidized on a pro-rata basis to purchase a new tire. To submit a claim, installation record, tire rotation record, tire rotation records, and tire removal record must be provided with the claimed tire.

- Tires must be rotated every 6,000 to 8,000 miles (10,000 to 13,000 km), or sooner.
- This warranty does not apply to original equipment (OE) tires.
- The Treadwear Mileage Warranty applies only to the original purchaser and owner of the tires.
- This Mileage Warranty does not apply to tires used in commercial applications, including but not limited to law enforcement vehicles, taxi services, courier services, delivery fleets, or other commercial uses.
- To qualify for this warranty, tires must show even tread wear, with no more than a 2/32" difference in tread depth across the tire tread.

Mileage warranty product list:

Product Line	Mileage Warranty	Product Line	Mileage Warranty
LION SPORT 3	50,000 miles (80,000 km)	LION SPORT A/T	50,000 miles (80,000 km)
LION SPORT HP^3	60,000 miles (100,000 km)	LION CLIMBER X/T	55,000 miles (90,000 km)
LION SPORT 4X4 ^{HP3}	60,000 miles (100,000 km)	LION CLIMBER R/T	50,000 miles (80,000 km)
LION SPORT H/T	50,000 miles (80,000 km)	I+17	50,000 miles (80,000 km)

90-DAY Customer Satisfaction Trial

LingLong offers a 90 Day Free Trial as the following :

- Applies to passenger tires only (Excludes commercial, light truck (LT), racing, and other specialty tires).
- This Satisfaction Guarantee applies only to the original purchaser who purchases at least four (4) new passenger tires in a single transaction. It does not apply to replacement tires provided under this guarantee.
- This guarantee does not apply to tires that have been intentionally damaged or damaged due to misuse, abuse, or improper use.
- How do you return your tires during the trial period?

A.Within the applicable trial period from the date of purchase, you must return your tires to the tire dealer where you purchased your tires.

B.Present the original sales receipt or other proof of purchase.

C.Provide the reason for your dissatisfaction (such as appearance, ride comfort, or handling, etc.).

To make a claim under this limited warranty

- Present your tires and the original proof of purchase to the original place of purchase or any authorized Company dealer.
- Complete and sign the Warranty Claim Adjustment Form, keep a copy for your records, and leave the tire with the dealer for warranty claim processing;

Owner's obligation

- At the time of purchase, tires must be properly installed with recommended inflation and balanced. Observe rotation and alignment regularly according to recommendations.
- To submit a warranty claim, contact the original place of purchase or any authorized Company dealer.
- The owner is responsible for all service charges and applicable taxes.
- A copy of the original proof of purchase must be submitted to support the warranty claim.

Tire safety and maintenance

Tire failure can result in serious property damage and/or personal injury. To help reduce these risks, we recommend the following safety practices:

1. Maintain proper tire inflation pressure. Do not underinflate or overinflate your tires. Always maintain inflation pressure according to the vehicle manufacturer's recommendations or the tire manufacturer's specifications.
2. Check wheel alignment and tire balance regularly to help ensure proper handling, performance, and even tread wear.
3. Do not overload your vehicle. Refer to the tire sidewall markings for the tire's maximum load-carrying capacity.
4. Avoid excessive tire spinning & impacts with curbs, potholes, obstacles, pavement edges.
5. Never drive on worn-out (bald) tires. By law, tires must be replaced when the tread reaches the Tread Wear Indicator (TWI).
6. Inspect your tires regularly for signs of damage, including cuts, abrasions, punctures, foreign objects, separations, or bulges. If damage is found, replace the tire with the spare tire (if available) and consult an authorized tire dealer.
7. Do not exceed posted speed limits or the maximum speed rating specified for the tire.
8. To promote even wear and maximize tread life, rotate your tires at least every 6,000 miles (10,000 km) or according to the vehicle manufacturer's recommendations.

Exclusions, Limitations, and Legal Rights

No representative, dealer, or distributor is authorized to make any representation, promise, or agreement on behalf of Linglong, except as expressly stated in this warranty document. Any tire, regardless of construction quality, may fail in service or otherwise become unserviceable due to conditions beyond the manufacturer's control. This warranty does not constitute a representation that tire failure will not occur under any circumstances.

DISCLAIMER: This warranty is provided in lieu of all other warranties and representations, express or implied. Linglong expressly disclaims all implied warranties, including but not limited to the implied warranties of merchantability and fitness for a particular purpose. No other warranty, guarantee, or representation of any kind shall be deemed to exist or arise by operation of law.

LIMITATION OF DAMAGES: Under no circumstances shall Linglong be liable for any indirect, special, incidental, consequential, or punitive damages, including but not limited to loss of profits, business interruption, loss of reputation or goodwill, or costs related to replacement transportation or other related expenses. Some states and provinces do not allow the exclusion or limitation of incidental or consequential damages; therefore, certain portions of this limitation may not apply in specific jurisdictions.

This warranty establishes specific legal rights and obligations. Additional rights may apply depending on the applicable state or provincial laws.