LEAO TIRE

CATALOG

WEB

Customer Notes :

LINGLONG AMERICAS, INC.

Address:Linglong Americas 1484 Medina Road Suite 118
Medina, OH 44256

@leaotire2025 @leaotire2025

E-mail: linglong sales@linglong.cn

Web: leao-tire.com



TABLE OF CONTENTS

TRUCK TIRES TECHNICAL CATALOGUE



COMPANY INTRODUCTION 04

GLOBAL LAYOUT 07

LONG HAUL 09

ASL12PRO RADIAL TRUCK TIRE 11
ADL12PRO RADIAL TRUCK TIRE 13
ADL11 RADIAL TRUCK TIRE 15
ADL12 RADIAL TRUCK TIRE 17
ATL11 RADIAL TRUCK TIRE 19

REGIONAL 27

AAR21 RADIAL TRUCK TIRE 29
ADR21 RADIAL TRUCK TIRE 31
ATR21 RADIAL TRUCK TIRE 33
AAR22 RADIAL TRUCK TIRE 35
AAR22S RADIAL TRUCK TIRE 37

ON&OFF ROAD 53

AAM31 RADIAL TRUCK TIRE 55
AAM32w RADIAL TRUCK TIRE 57
AAM33w RADIAL TRUCK TIRE 59


COACH&URBAN 69

WINTER 73

SPECIAL TRAILER 81

AST21 RADIAL TRUCK TIRE 83
AST22 RADIAL TRUCK TIRE 85

Replacement Market Tires Warranty Manual 87

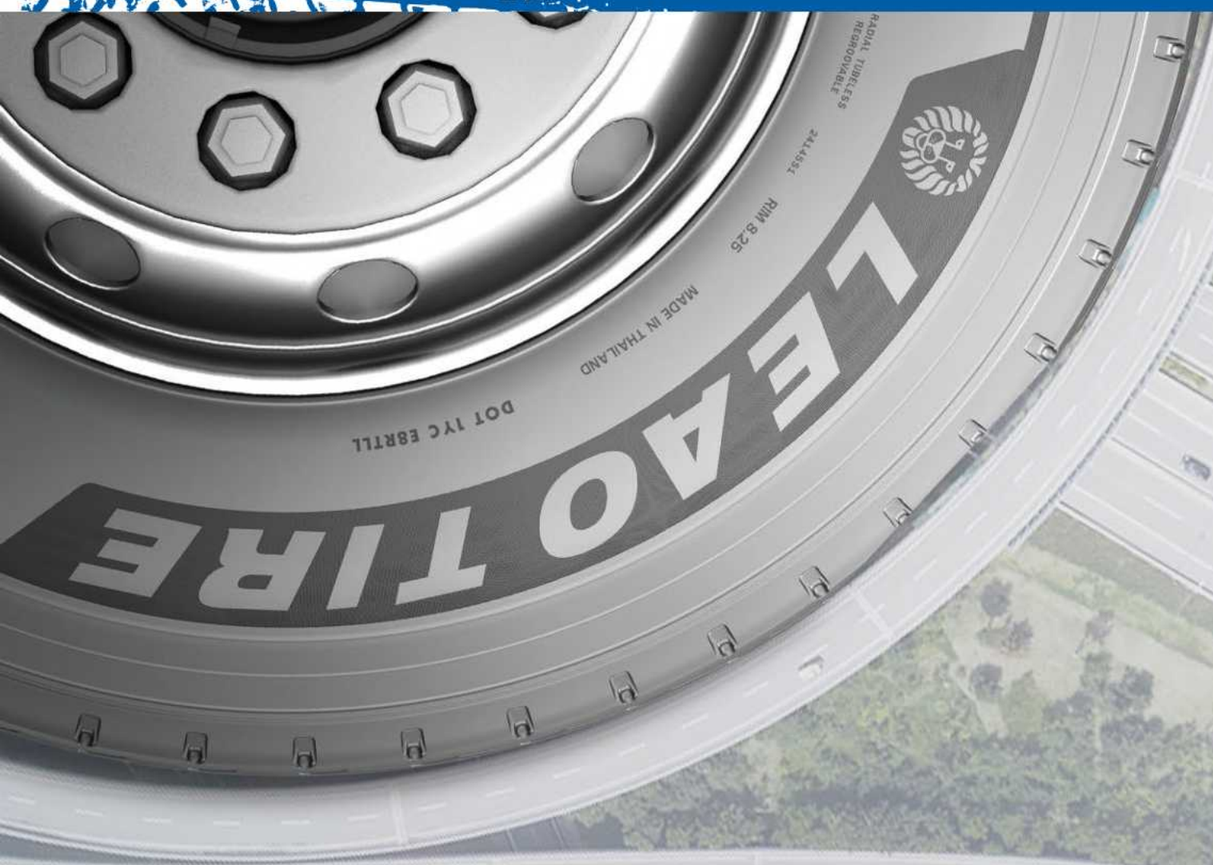

COMPANY INTRODUCTION

Founded in 1975, Shandong Linglong Tyre Co., Ltd. has grown into one of the world's leading tire manufacturers, delivering innovative and high-performance tire solutions to customers across more than 170 countries. As a vertically integrated manufacturer, Linglong combines advanced research and development, intelligent manufacturing, global supply chain capabilities, and comprehensive customer support to meet the evolving needs of the automotive and commercial transportation industries.

leao-tire.com

Our retail network consists of

200,000

outlets globally, promoting our brand reputation and customer loyalty through our reliable product quality and excellent customer service.

Sold in over 170 countries worldwide, Linglong Tire is a trusted global manufacturer supplying original equipment (OE) tires to more than 200 vehicle production facilities for over 70 leading automotive brands. With more than 300 million OE tires delivered globally, Linglong's proven engineering, quality, and manufacturing expertise provide distributors, dealers, fleets and OEM partners across the globe with reliable, high-performance tire solutions backed by global scale and consistent supply.

Linglong's brand value reached

17.85

Billion dollars in 2026

Linglong has sponsored over

100

Sports events and teams worldwide

SPONSORING SOME OF THE BIGGEST NAMES IN SPORTS

Such as Real Madrid CF and Chelsea FC, to enhance its brand awareness and influence.



GLOBAL LAYOUT



R&D Center in the United States

R&D Center in Germany

Serbia

Linglong International Europe d.o.o.Zrenjanin

Linglong International Tyre(Thailand)Co.,Ltd

Open R&D Innovation System

3 Countries

8 R&D Centers

1500+ Authorized Patents

2000+ Technical Team

Global Strategic Layout

Linglong Tire's global manufacturing network is built on a strategic "Globalization + Regionalization + Localization" approach, enabling the company to efficiently serve customers across key markets worldwide. With multiple production facilities throughout China and international manufacturing hubs in Thailand and Serbia, Linglong delivers scalable production capacity, reliable supply chain performance, and localized market support to distributors, dealers, fleets, and OEM partners around the world.

Production Bases Outside China

- Linglong International Tyre (Thailand) Co., Ltd.
- Linglong International Europe d.o.o. Zrenianin

Production Bases in China

- Jilin Linglong Tyre Co., Ltd.
- Shandong Linglong Tyre Co., Ltd.
- Dezhou Linglong Tyre Co., Ltd.
- Hubei Linglong Tyre Co., Ltd.
- Guangxi Linglong Tyre Co., Ltd.

LONG HAUL

TRUCK TIRES TECHNICAL CATALOGUE



ASL12PRO ADL12PRO ADL11 ADL12 ATL11

ASL12PRO RADIAL TRUCK TIRE 11
ADL12PRO RADIAL TRUCK TIRE 13
ADL11 RADIAL TRUCK TIRE 15
ADL12 RADIAL TRUCK TIRE 17
ATL11 RADIAL TRUCK TIRE 19
KTD10 RADIAL TRUCK TIRE 21
ADE892 RADIAL TRUCK TIRE 21
LLF16 RADIAL TRUCK TIRE 22
LLF16e+ RADIAL TRUCK TIRE 22
LLD37 RADIAL TRUCK TIRE 23
LLD37e+ RADIAL TRUCK TIRE 23
ATE821 RADIAL TRUCK TIRE 24
ADL817 RADIAL TRUCK TIRE 24
ATL811 RADIAL TRUCK TIRE 25
LLD76 RADIAL TRUCK TIRE 25

ASL12PRO

STEER

RADIAL TRUCK TIRE

STRONG GRIP

UNEVEN-WEAR-RESISTANT

MADE IN THAILAND




TEST RESULTS

SELLING POINTS OF TIRE PRODUCTS




Open designed decoupling groove for enhanced even wear performance.



Outer groove and shoulder sipes to extend tire life by protecting against cracking and tearing.



Center rib diagonal sipes to promote even wear and grip.



Exclusive velvet knurled font design for the high-endseries, offering a more premium texture.

ASL12PRO RADIAL TRUCK TIRE

Size	Load index& Speed symbols	PR	Load Range	Max load and max air (lbs&psi)				Overall Diameter in inches	Section Width in inches	Tread depth (In 32nds)
				Dual lbs	Dual psi	Single lbs	Single psi			
295/75R22.5	144/141L	14	G	5675	110	6175	110	39.92	11.73	18
295/75R22.5	146/143L	16	H	6005	120	6610	120	39.92	11.73	18
295/75R22.5	149/146L	18	J	6610	123	7160	123	39.92	11.73	18
11R22.5	146/143L	16	H	6005	120	6610	120	41.05	11.06	18
11R24.5	149/146L	16	H	6610	120	7610	120	43.02	11.06	18



ADL12PRO

DRIVE


RADIAL TRUCK TIRE

STRONG GRIP | UNEVEN-WEAR-RESISTANT | TRACTION



MADE IN THAILAND

TEST RESULTS

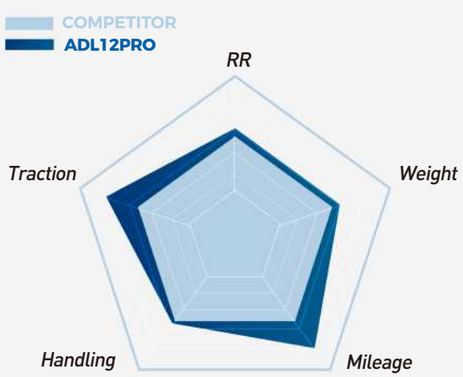

SELLING POINTS OF TIRE PRODUCTS



Aggressive center lugs help to improve traction in wetor dry conditions for the life of the tread.



Exclusive velvet knurled font design for the high-endseries, offering a more premium texture.



Z-Zag groove provides good traction performance.



Closed shoulder promoted uniform wear and improved rolling resistance.

ADL12PRO RADIAL TRUCK TIRE

Size	Load index& Speed symbols	PR	Load Range	Max load and max air (lbs&psi)				Overall Diameter in inches	Section Width in inches	Tread depth (In 32nds)
				Dual lbs	Dual psi	Single lbs	Single psi			
295/75R22.5	144/141L	14	G	5675	110	6175	110	40.39	11.73	28
295/75R22.5	146/143L	16	H	6005	120	6610	120	40.39	11.73	28
11R22.5	146/143L	16	H	6005	120	6610	120	41.05	11.06	28
11R24.5	149/146L	16	H	6610	120	7610	120	43.02	11.06	28



ADL11

DRIVE


RADIAL TRUCK TIRE

STRONG GRIP

WEAR-RESISTANT




TEST RESULTS

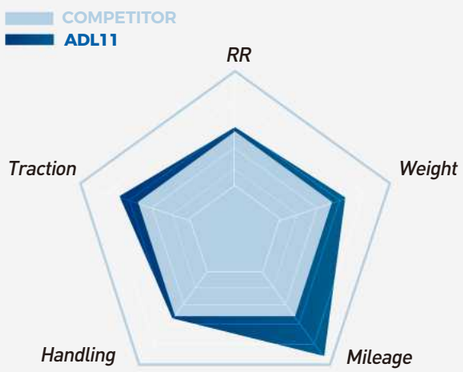

SELLING POINTS OF TIRE PRODUCTS




Closed shoulder promoted uniform wear and improved rolling resistance.



Z-Zag groove provides good traction performance.



Aggressive center lugs help to improve traction in wet or dry conditions for the life of the tread.



Meet Smartway Verified standard.

ADL11 RADIAL TRUCK TIRE

Size	Load index& Speed symbols	PR	Load Range	Max load and max air (lbs&psi)				Overall Diameter in inches	Section Width in inches	Tread depth (In 32nds)
				Dual lbs	Dual psi	Single lbs	Single psi			
295/75R22.5	146/143L	16	H	6005	120	6610	120	41.53	11.06	26
295/75R22.5	149/146L	16	H	6610	120	7610	120	43.50	11.06	26
11R22 5	144/141L	14	H	5675	110	6175	110	40.24	11.54	26
11R24.5	146/143L	16	H	6005	120	6610	120	40.24	11.54	26



ADL12

DRIVE

RADIAL TRUCK TIRE

TRACTION WEAR-RESISTANT

MADE IN THAILAND



TEST RESULTS

SELLING POINTS OF TIRE PRODUCTS



Closed shoulder promoted uniform wear and improved rolling resistance.



Z-Zag groove provides good traction performance.



Aggressive center lugs help to improve traction in wet or dry conditions for the life of the tread.

ADL12 RADIAL TRUCK TIRE

Size	Load index& Speed symbols	PR	Load Range	Max load and max air (lbs&psi)				Overall Diameter in inches	Section Width in inches	Tread depth (In 32nds)
				Dual lbs	Dual psi	Single lbs	Single psi			
295/75R22.5	146/143L	16	H	6005	120	6610	120	40.24	11.54	26



ATL11


TRAILER

RADIAL TRUCK TIRE


FUEL-EFFICIENT

WEAR-RESISTANT

MADE IN THAILAND

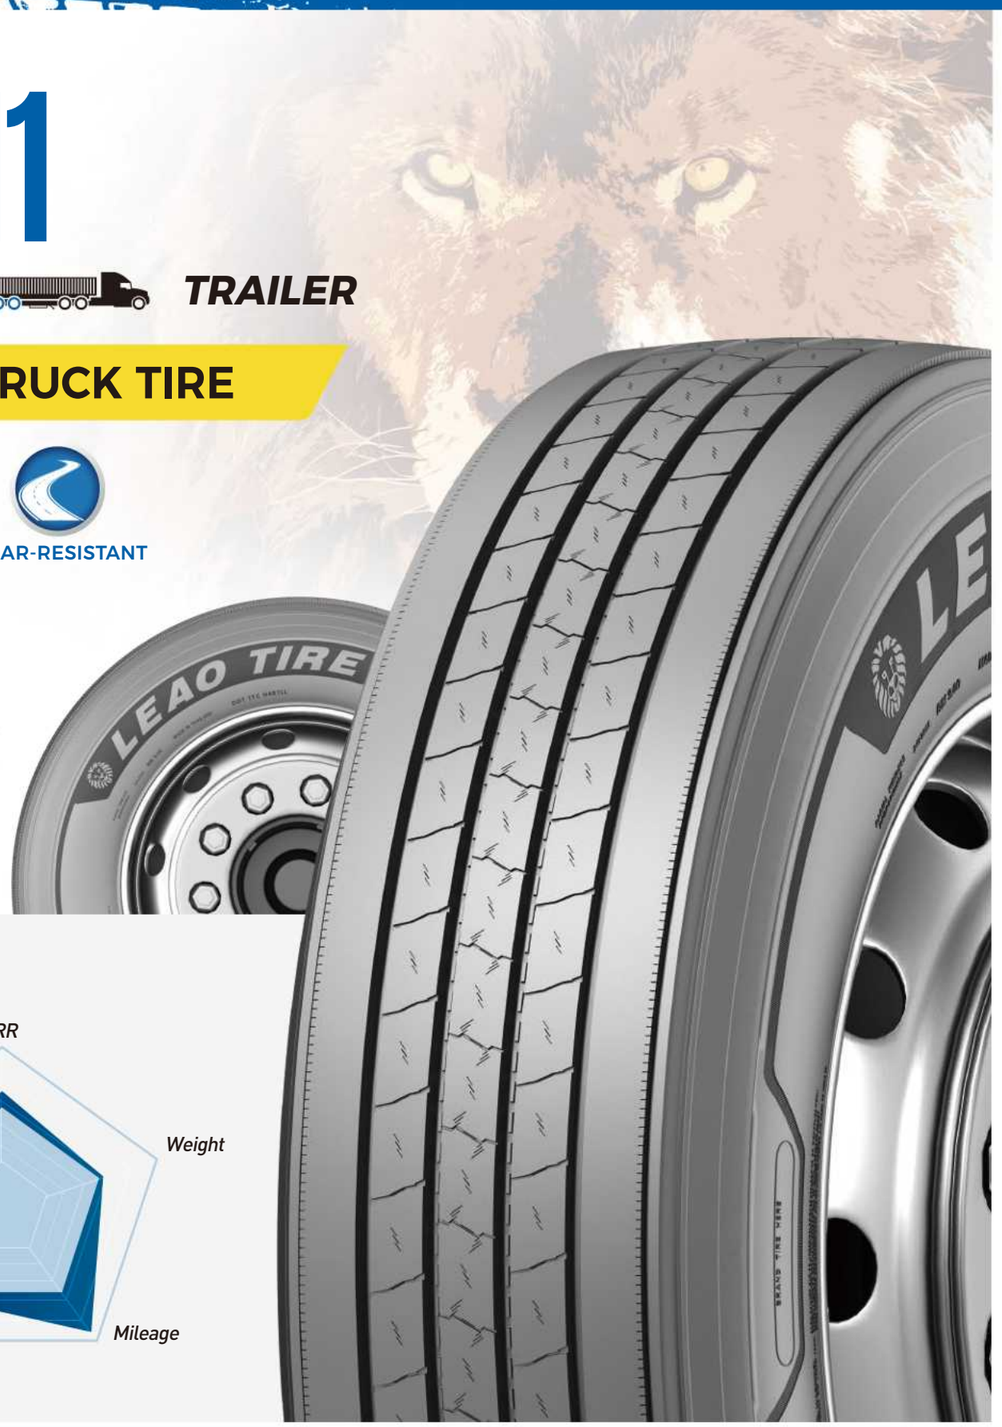

TEST RESULTS

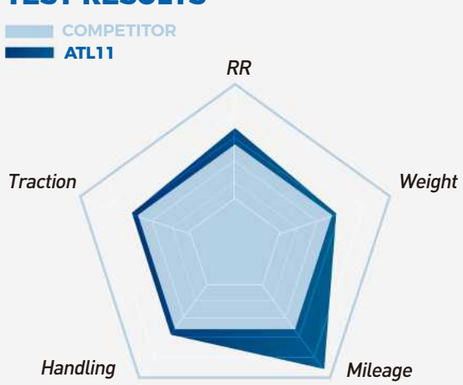

SELLING POINTS OF TIRE PRODUCTS



Closed shoulder promoted uniform wear and improved rolling resistance.



Micro sipes on groove edges resists abnormal or "river wear".



Decoupling groove helps resist uneven shoulder wear.

ATL11 RADIAL TRUCK TIRE

Size	Load index& Speed symbols	PR	Load Range	Max load and max air (lbs&psi)				Overall Diameter in inches	Section Width in inches	Tread depth (In 32nds)
				Dual lbs	Dual psi	Single lbs	Single psi			
295/75R22.5	146/143L	16	H	6005	120	6610	120	39.41	11.42	12
11R22.5	146/143L	16	H	6005	120	6610	120	40.94	11.10	12
11R24.5	149/146L	16	H	6610	120	7160	120	42.91	11.10	12



KTD10

DRIVE



KTD10 RADIAL TRUCK TIRE

Size	Load Index	PR	Speed Symbols	Standard Rim	Max load and max air (lbs&psi)				Overall Diameter (in)	Section Width (in)	Tread Depth (In 32nds)	Operation Norm
					Dual lbs	Dual psi	Single lbs	Single psi				
11R22.5	144/142	14	L	8.25	5840	105	6175	105	41.93	10.98	30.0	TRA
11R22.5	146/143	16	L	8.25	6005	120	6610	120	41.93	10.98	30.0	TRA
11R24.5	146/143	14	L	8.25	6005	105	6610	105	43.94	10.98	30.0	TRA
11R24.5	149/146	16	L	8.25	6610	120	7160	120	43.94	10.98	30.0	TRA
285/75R24.5	144/141	14	L	8.25	5675	110	6175	110	41.81	11.14	28.0	TRA
285/75R24.5	147/144	16	L	8.25	6175	120	6780	120	41.81	11.14	28.0	TRA
295/75R22.5	144/141	14	L	9.00	5675	110	6175	110	40.39	11.73	28.0	TRA
295/75R22.5	146/143	16	L	9.00	6005	120	6610	120	40.39	11.73	28.0	TRA

Low rolling resistance reduces fuel consumption.

Closed shoulder to fight irregular wear.

New pattern design improves mileage for long-distance transportation.

ADE892

DRIVE



ADE892 RADIAL TRUCK TIRE

Size	Load Index	PR	Speed Symbols	Standard Rim	Max load and max air (lbs&psi)				Overall Diameter (in)	Section Width (in)	Tread Depth (In 32nds)	Operation Norm
					Dual lbs	Dual psi	Single lbs	Single psi				
11R22.5	144/142	14	L	8.25	5840	105	6175	105	41.93	10.98	27.7	TRA
11R22.5	146/143	16	L	8.25	6005	120	6610	120	41.93	10.98	27.7	TRA
11R24.5	146/143	14	L	8.25	6005	105	6610	105	43.94	10.98	27.7	TRA
11R24.5	149/146	16	L	8.25	6610	120	7160	120	43.94	10.98	27.7	TRA
285/75R24.5	144/141	14	L	8.25	5675	110	6175	110	41.81	11.14	27.7	TRA
285/75R24.5	147/144	16	L	8.25	6175	120	6780	120	41.81	11.14	27.7	TRA
295/75R22.5	144/141	14	L	9.00	5675	110	6175	110	40.39	11.73	27.7	TRA
295/75R22.5	146/143	16	L	9.00	6005	120	6610	120	40.39	11.73	27.7	TRA

Good braking and grip on wet road.

Long life, low rolling resistance.

Strong carcass materials.

Optimize the footprint for even wear and long tread life.

Help to promote tire durability and provide tire retreadability.

LLF16

STEER



LLF16 RADIAL TRUCK TIRE

Size	Load Index	PR	Speed Symbols	Standard Rim	Max load and max air (lbs&psi)				Overall Diameter (in)	Section Width (in)	Tread Depth (In 32nds)	Operation Norm
					Dual lbs	Dual psi	Single lbs	Single psi				
11R22.5	144/142	14	M	8.25	5840	105	6175	105	41.50	10.98	18.3	TRA
11R22.5	146/143	16	M	8.25	6005	120	6610	120	41.50	10.98	18.3	TRA
11R24.5	146/143	14	M	8.25	6005	105	6610	105	43.46	10.98	18.3	TRA
11R24.5	149/146	16	M	8.25	6610	120	7160	120	43.46	10.98	18.3	TRA
285/75R24.5	144/141	14	M	8.25	5675	110	6175	110	41.34	11.14	18.3	TRA
285/75R24.5	147/144	16	M	8.25	6175	120	6780	120	41.34	11.14	18.3	TRA
295/75R22.5	144/141	14	M	9.00	5675	110	6175	110	39.92	11.73	18.3	TRA
295/75R22.5	146/143	16	M	9.00	6005	120	6610	120	39.92	11.73	18.3	TRA

Good handling.

Long life.

LLF16e+

STEER



LLF16e+ RADIAL TRUCK TIRE

Size	Load Index	PR	Speed Symbols	Standard Rim	Max load and max air (lbs&psi)				Overall Diameter (in)	Section Width (in)	Tread Depth (In 32nds)	Operation Norm
					Dual lbs	Dual psi	Single lbs	Single psi				
★ 11R22.5	144/142	14	M	8.25	5840	105	6175	105	41.50	10.98	18.3	TRA
★ 11R22.5	146/143	16	M	8.25	6005	120	6610	120	41.50	10.98	18.3	TRA
★ 11R24.5	146/143	14	M	8.25	6005	105	6610	105	43.46	10.98	18.3	TRA
★ 11R24.5	149/146	16	M	8.25	6610	120	7160	120	43.46	10.98	18.3	TRA
★ 285/75R24.5	144/141	14	M	8.25	5675	110	6175	110	41.34	11.14	18.3	TRA
★ 285/75R24.5	147/144	16	M	8.25	6175	120	6780	120	41.34	11.14	18.3	TRA
★ 295/75R22.5	144/141	14	M	9.00	5675	110	6175	110	39.92	11.73	18.3	TRA
★ 295/75R22.5	146/143	16	M	9.00	6005	120	6610	120	39.92	11.73	18.3	TRA

Good handling.

Low fuel consumption.

Certified by U.S.A SmartWay.

★: SmartWay

LLD37

DRIVE



LLD37 *RADIAL TRUCK TIRE*

Size	Load Index	PR	Speed Symbols	Standard Rim	Max load and max air (lbs&psi)				Overall Diameter (in)	Section Width (in)	Tread Depth (In 32nds)	Operation Norm
					Dual lbs	Dual psi	Single lbs	Single psi				
11R22.5	144/142	14	M	8.25	5840	105	6175	105	41.93	10.98	27.7	TRA
11R22.5	146/143	16	M	8.25	6005	120	6610	120	41.93	10.98	27.7	TRA
11R24.5	146/143	14	M	8.25	6005	105	6610	105	43.94	10.98	27.7	TRA
11R24.5	149/146	16	M	8.25	6610	120	7160	120	43.94	10.98	27.7	TRA
285/75R24.5	144/141	14	M	8.25	5675	110	6175	110	41.81	11.14	27.7	TRA
285/75R24.5	147/144	16	M	8.25	6175	120	6780	120	41.81	11.14	27.7	TRA
295/75R22.5	144/141	14	M	9.00	5675	110	6175	110	40.39	11.73	27.7	TRA
295/75R22.5	146/143	16	M	9.00	6005	120	6610	120	40.39	11.73	27.7	TRA

Good braking and grip on wet road.

Long life.

LLD37e+

DRIVE



LLD37e+ *RADIAL TRUCK TIRE*

Size	Load Index	PR	Speed Symbols	Standard Rim	Max load and max air (lbs&psi)				Overall Diameter (in)	Section Width (in)	Tread Depth (In 32nds)	Operation Norm
					Dual lbs	Dual psi	Single lbs	Single psi				
★ 11R22.5	144/142	14	M	8.25	5840	105	6175	105	41.93	10.98	22.0	TRA
★ 11R22.5	146/143	16	M	8.25	6005	120	6610	120	41.93	10.98	22.0	TRA
★ 11R24.5	146/143	14	M	8.25	6005	105	6610	105	43.94	10.98	27.7	TRA
★ 11R24.5	149/146	16	M	8.25	6610	120	7160	120	43.94	10.98	27.7	TRA
★ 285/75R24.5	144/141	14	M	8.25	5675	110	6175	110	41.81	11.14	27.7	TRA
★ 285/75R24.5	147/144	16	M	8.25	6175	120	6780	120	41.81	11.14	27.7	TRA
★ 295/75R22.5	144/141	14	M	9.00	5675	110	6175	110	40.39	11.73	27.7	TRA
★ 295/75R22.5	146/143	16	M	9.00	6005	120	6610	120	40.39	11.73	27.7	TRA

Good braking and grip on wet road.

Long life.

Low fuel consumption.

Certified by U.S.A SmartWay.

★: SmartWay

ATE821

TRAILER



ATE821 *RADIAL TRUCK TIRE*

Size	Load Index	PR	Speed Symbols	Standard Rim	Max load and max air (lbs&psi)				Overall Diameter (in)	Section Width (in)	Tread Depth (In 32nds)	Operation Norm
					Dual lbs	Dual psi	Single lbs	Single psi				
★ 11R22.5	144/142	14	M	8.25	5840	105	6175	105	41.50	10.98	12.0	TRA
★ 11R22.5	146/143	16	M	8.25	6005	120	6610	120	41.50	10.98	12.0	TRA
★ 11R24.5	146/143	14	M	8.25	6005	105	6610	105	43.46	10.98	12.0	TRA
★ 11R24.5	149/146	16	M	8.25	6610	120	7160	120	43.46	10.98	12.0	TRA
★ 285/75R24.5	144/141	14	M	8.25	5675	110	6175	110	41.34	11.14	12.0	TRA
★ 285/75R24.5	147/144	16	M	8.25	6175	120	6780	120	41.34	11.14	12.0	TRA
★ 295/75R22.5	144/141	14	M	9.00	5675	110	6175	110	39.92	11.73	12.6	TRA
★ 295/75R22.5	146/143	16	M	9.00	6005	120	6610	120	39.92	11.73	12.6	TRA

Excellent straight running performance.

Sipes in shoulder offer low noise and good heat dissipation.

Low fuel consumption.

★: SmartWay

ADL817

DRIVE



ADL817 *RADIAL TRUCK TIRE*

Size	Load Index	PR	Speed Symbols	Standard Rim	Max load and max air (lbs&psi)				Overall Diameter (in)	Section Width (in)	Tread Depth (In 32nds)	Operation Norm
					Dual lbs	Dual psi	Single lbs	Single psi				
★ 445/50R22.5	158	18	L	14.00	---	---	9370	110	40.08	17.52	25.2	TRA
★ 445/50R22.5	161	20	L	14.00	---	---	10200	120	40.08	17.52	25.2	TRA
★ 445/50R22.5	155	18	L	14.00	---	---	8540	102	40.08	17.52	25.2	ETRTO
★ 445/50R22.5	161	20	L	14.00	---	---	10200	123	40.08	17.52	25.2	ETRTO

Typical block pattern design makes good towing and grip on wet and dry road.

Low fuel consumption.

Wear-resistance compound reduces shifting to prevent uneven wear.

★: SmartWay

ATL811

TRAILER



ATL811 *RADIAL TRUCK TIRE*

Size	Load Index	PR	Speed Symbols	Standard Rim	Max load and max air (lbs&psi)				Overall Diameter (in)	Section Width (in)	Tread Depth (In 32nds)	Operation Norm
					Dual lbs	Dual psi	Single lbs	Single psi				
★ 445/50R22.5	158	18	L	14.00	---	---	9370	110	40.08	17.52	25.2	TRA
★ 445/50R22.5	161	20	L	14.00	---	---	10200	120	40.08	17.52	25.2	TRA
★ 445/50R22.5	155	18	L	14.00	---	---	8540	102	40.08	17.52	25.2	ETRTO
★ 445/50R22.5	161	20	L	14.00	---	---	10200	123	40.08	17.52	25.2	ETRTO

Low fuel consumption.

Wear-resistance compound reduces shifting to prevent uneven wear.

★: SmartWay

LLD76

DRIVE



LLD76 *RADIAL TRUCK TIRE*

Size	Load Index	PR	Speed Symbols	Standard Rim	Max load and max air (lbs&psi)				Overall Diameter (in)	Section Width (in)	Tread Depth (In 32nds)	Operation Norm
					Dual lbs	Dual psi	Single lbs	Single psi				
11R22.5	144/142	14	M	8.25	5840	105	6175	105	41.65	10.98	25.2	TRA
11R22.5	146/143	16	M	8.25	6005	120	6610	120	41.65	10.98	25.2	TRA
11R24.5	146/143	14	M	8.25	6005	105	6610	105	43.66	10.98	25.2	TRA
11R24.5	149/146	16	M	8.25	6610	120	7160	120	43.66	10.98	25.2	TRA

Good braking and grip on wet road.

Construction optimized for long service life.



REGIONAL

TRUCK TIRES TECHNICAL CATALOGUE



AAR21 RADIAL TRUCK TIRE 29
ADR21 RADIAL TRUCK TIRE 31
ATR21 RADIAL TRUCK TIRE 33
AAR22 RADIAL TRUCK TIRE 35
AAR22s RADIAL TRUCK TIRE 37
ATL863 RADIAL TRUCK TIRE 39
KTA20 RADIAL TRUCK TIRE 39
KTD23 RADIAL TRUCK TIRE 40
F816e+ RADIAL TRUCK TIRE 40
F816 RADIAL TRUCK TIRE 41
T810 RADIAL TRUCK TIRE 41
ATL812 RADIAL TRUCK TIRE 42
T810e+ RADIAL TRUCK TIRE 42
LLF56+ RADIAL TRUCK TIRE 43
KTD301 RADIAL TRUCK TIRE 43
LLA18 RADIAL TRUCK TIRE 44
LLA28 RADIAL TRUCK TIRE 44
KTT306 RADIAL TRUCK TIRE 44
F820 RADIAL TRUCK TIRE 45
D905 RADIAL TRUCK TIRE 46
D928 RADIAL TRUCK TIRE 46
LLF02 RADIAL TRUCK TIRE 47
AAL800 RADIAL TRUCK TIRE 47
KTA303 RADIAL TRUCK TIRE 48
KTT308 RADIAL TRUCK TIRE 48
KTD303 RADIAL TRUCK TIRE 49
KTT307 RADIAL TRUCK TIRE 49
LLF02e+ RADIAL TRUCK TIRE 50
A928 RADIAL TRUCK TIRE 50
LLF86 RADIAL TRUCK TIRE 50
KJT016 RADIAL TRUCK TIRE 51
D955 RADIAL TRUCK TIRE 51
AFL866 RADIAL TRUCK TIRE 52
LLA78 RADIAL TRUCK TIRE 52

AAR21

ALL POSITION

RADIAL TRUCK TIRE

RESISTANCE

GOOD HANDLING




MADE IN THAILAND

TEST RESULTS

SELLING POINTS OF TIRE PRODUCTS



A combination of 4 wavy and straight groove proyide outstanding traction and drainage performance for a smoother ride and better handling.



Optimized rib distribution proportioned for added stiffness, which helps reduceirregular wear.



Tough tread compound and solid shoulder ribs to resist maneuver-ing scrub.

AAR21 *RADIAL TRUCK TIRE*

Size	Load index& Speed symbols	PR	Load Range	Max load and max air (lbs&psi)				Overall Diameter in inches	Section Width in inches	Tread depth (In 32nds)
				Dual lbs	Dual psi	Single lbs	Single psi			
295/75R22.5	146/143L	16	H	6005	120	6610	120	39.93	11.54	21
11R22.5	146/143L	16	H	6005	120	6610	120	41.21	11.06	21
11R24.5	149/146L	16	H	6610	120	7160	120	43.18	11.06	21
255/70R22.5	140/137M	16	H	5070	120	5510	120	36.55	10.16	17
215/75R17.5*	135/133J	16	H	4540	123	4805	123	30.24	8.35	16
225/70R19.5	128/126L	14	G	3750	110	3970	110	31.83	8.94	16
235/75R17.5*	143/141J	18	J	5675	127	6005	127	31.34	9.29	17
245/70R19.5	135/133L	16	H	4540	120	4805	120	32.95	9.61	17
10R22.5	141/139M	14	G	5355	115	5675	115	39.98	10.00	18
275/70R22.5	148/145M	18	J	6940	130	6395	130	37.62	10.55	18

*Low profile trailer



ADR21

DRIVE


RADIAL TRUCK TIRE

IMMOBILIZE TRACTIVE FORCE

MADE IN THAILAND




TEST RESULTS

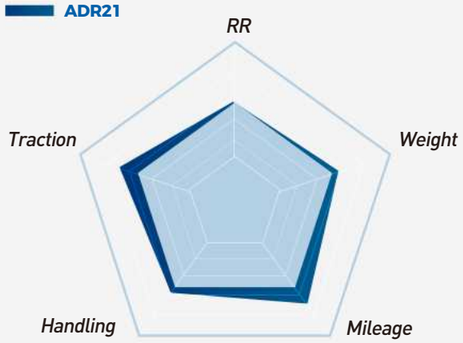

SELLING POINTS OF TIRE PRODUCTS



Open shoulder offers good traction and help with heat dissipation while durable tread compound and narrow groove betweenshoulder and next rid designed for excellent wear resistance on shoulder .



Aggressive pattern and lateral grooves provides tire excellent drive and braking performance.



Two main grooves helps to provide good handling performance.

ADR21 *RADIAL TRUCK TIRE*

Size	Load index& Speed symbols	PR	Load Range	Max load and max air (lbs&psi)				Overall Diameter in inches	Section Width in inches	Tread depth (In 32nds)
				Dual lbs	Dual psi	Single lbs	Single psi			
295/75R22.5	146/143L	16	H	6005	120	6610	120	40.50	11.54	30
11R22.5	146/143L	16	H	6005	120	6610	120	41.78	11.06	30
11R24.5	149/146L	16	H	6610	120	7160	120	43.75	11.06	30



ATR21

TRAILER

RADIAL TRUCK TIRE

RESISTANCE

WEAR-RESISTANT



MADE IN THAILAND

TEST RESULTS

SELLING POINTS OF TIRE PRODUCTS



Wide, continuous shoulder ribs fight turning side forces and resist tearing.




Micro sipes on groove edges resists abnormal or "river wear".



Deep tread depth for high-Scrub trailer service.

ATR21 *RADIAL TRUCK TIRE*

Size	Load index& Speed symbols	PR	Load Range	Max load and max air (lbs&psi)				Overall Diameter in inches	Section Width in inches	Tread depth (In 32nds)
				Dual lbs	Dual psi	Single lbs	Single psi			
295/75R22.5	146/143L	16	H	6005	120	6610	120	39.72	11.42	17
11R22.5	146/143L	16	H	6005	120	6610	120	41.26	11.10	17
11R24.5	149/146L	16	H	6610	120	7160	120	43.23	11.10	17

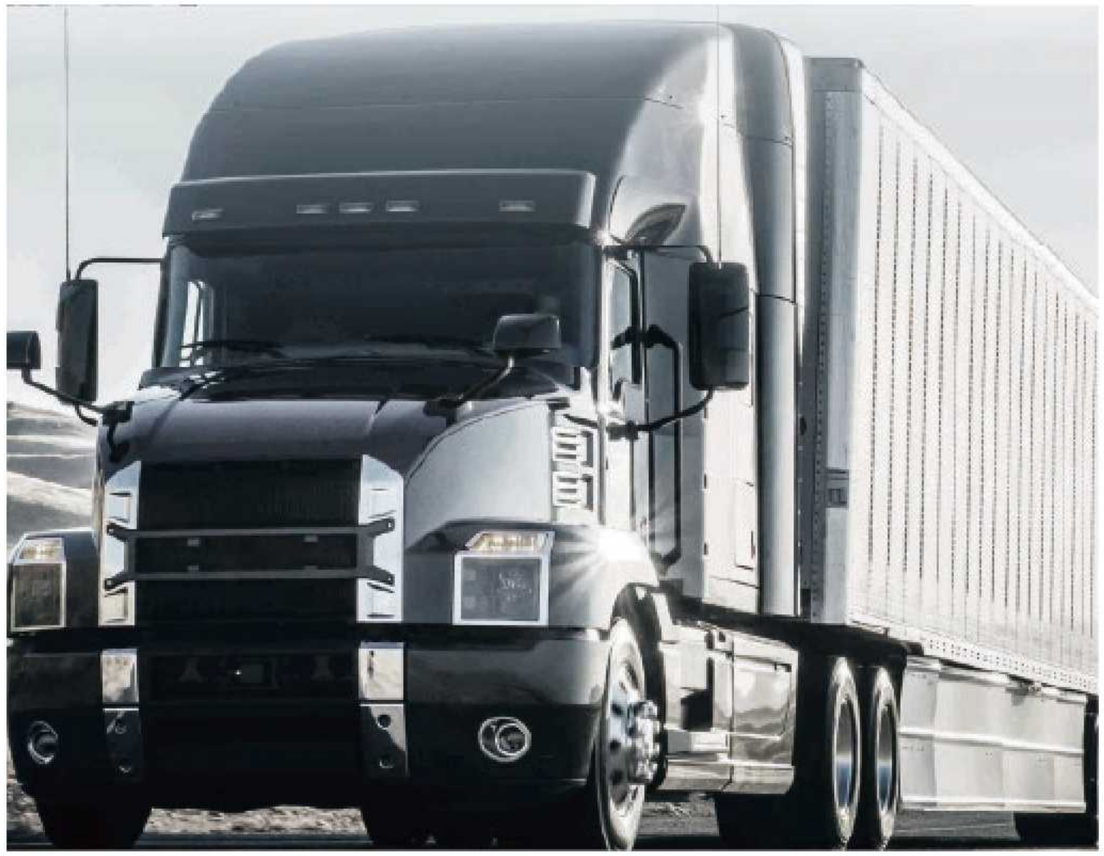

AAR22

ALL POSITION

RADIAL TRUCK TIRE

TRACTION

WEAR-RESISTANT



MADE IN THAILAND

TEST RESULTS

SELLING POINTS OF TIRE PRODUCTS



Tough tread compound and solid shoulder ribs to resist maneuvering scrub.



A combination of 4 wavy and straight groove provide outstanding traction and drainage performance.



Center rib diagonal sipes to promote even wear and grip.

AAR22 RADIAL TRUCK TIRE

Size	Load index& Speed symbols	PR	Load Range	Max load and max air (lbs&psi)				Overall Diameter in inches	Section Width in inches	Tread depth (In 32nds)
				Dual lbs	Dual psi	Single lbs	Single psi			
295/75R22.5	146/143L	16	H	6005	120	6610	120	39.93	11.54	21



AAR22s

ALL POSITION

RADIAL TRUCK TIRE

GROUND GRIP | LONG LIFE | TRACTIVE FORCE




TEST RESULTS

SELLING POINTS OF TIRE PRODUCTS



A combination of 3 wavy grooves and lateral sipes on block provide outstanding traction and drainage performance in all weather conditions.



Deep tread depth of 20/32nds provides long tread life.

AAR22s meet 3 Peak Mountain Snow Flake (3PMSF) criteria for snow traction performance.



Sidewall protector ribs preserve casing durability by fighting curbing damage with thick ribs on both sidewalls.

AAR22s *RADIAL TRUCK TIRE*

Size	Load index& Speed symbols	PR	Load Range	Max load and max air (lbs&psi)				Overall Diameter in inches	Section Width in inches	Tread depth (In 32nds)
				Dual lbs	Dual psi	Single lbs	Single psi			
225/70R19.5	128/126M	14	G	3750	110	3970	110	32.08	8.94	20
245/70R19.5	135/133M	16	H	4540	120	4805	120	33.14	9.61	20
215/75R17.5	135/133L	16	H	4540	123	4805	123	30.41	8.35	19
265/70R19.5	137/134L	14	G	4675	110	5070	110	34.02	10.31	20



ATL863

TRAILER



ATL863 RADIAL TRUCK TIRE

Size	Load Index	PR	Speed Symbols	Standard Rim	Max load and max air (lbs&psi)				Overall Diameter (in)	Section Width (in)	Tread Depth (In 32nds)	Operation Norm
					Dual lbs	Dual psi	Single lbs	Single psi				
385/55R22.5	158	18	L	12.25	---	---	9370	123	39.21	15.20	20.8	ETRTO
385/55R22.5	160(158)	20	J(L)	12.25	---	---	9915	130	39.21	15.20	20.8	ETRTO
385/65R22.5	164	24	J	11.75	---	---	11000	130	42.20	15.31	20.8	ETRTO
385/65R22.5	164(158)	24	K(L)	11.75	---	---	11000	130	42.20	15.31	20.8	ETRTO
385/65R22.5	158	18	L	11.75	---	---	9370	123	42.20	15.31	20.8	ETRTO
385/65R22.5	160(158)	20	J(L)	11.75	---	---	9915	130	42.20	15.31	20.8	ETRTO
425/65R22.5	162	18	K	12.25	---	---	10470	110	44.25	16.61	22.0	TRA
425/65R22.5	165	20	K	12.25	---	---	11400	120	44.25	16.61	22.0	ETRTO
445/65R22.5	169	20	J	13.00	---	---	12800	130	45.28	17.48	22.7	ETRTO

Typical combined pattern design offers optimal trailer performance.

Low rolling resistance.

Wear-resistance compound reduces shifting to prevent uneven wear.

KTA20

TRAILER&STEER



KTA20 RADIAL TRUCK TIRE

Size	Load Index	PR	Speed Symbols	Standard Rim	Max load and max air (lbs&psi)				Overall Diameter (in)	Section Width (in)	Tread Depth (In 32nds)	Operation Norm
					Dual lbs	Dual psi	Single lbs	Single psi				
★ 11R22.5	144/142	14	L	8.25	5840	105	6175	105	41.50	10.98	19.0	TRA
★ 11R22.5	146/143	16	L	8.25	6005	120	6610	120	41.50	10.98	19.0	TRA
★ 11R24.5	146/143	14	L	8.25	6005	105	6610	105	43.46	10.98	19.0	TRA
★ 11R24.5	149/146	16	L	8.25	6610	120	7160	120	43.46	10.98	19.0	TRA
★ 285/75R24.5	144/141	14	L	8.25	5675	110	6175	110	41.34	11.14	19.0	TRA
★ 285/75R24.5	147/144	16	L	8.25	6175	120	6780	120	41.34	11.14	19.0	TRA
★ 295/75R22.5	144/141	14	L	9.00	5675	110	6175	110	39.92	11.73	19.0	TRA
★ 295/75R22.5	146/143	16	L	9.00	6005	120	6610	120	39.92	11.73	19.0	TRA

Wide and strong shoulder ribs increase tread life.

Lasting grip and stability.

High wear resistance.

★: SmartWay

KTD23

DRIVE



KTD23 RADIAL TRUCK TIRE

Size	Load Index	PR	Speed Symbols	Standard Rim	Max load and max air (lbs&psi)				Overall Diameter (in)	Section Width (in)	Tread Depth (In 32nds)	Operation Norm
					Dual lbs	Dual psi	Single lbs	Single psi				
215/75R17.5	135/133	16	L	6.00	4540	123	4805	123	30.20	8.31	19	ETRTO
225/70R19.5	125/123	12	L	6.75	3415	95	3640	95	31.93	8.90	20	TRA
225/70R19.5	128/126	14	L	6.75	3750	110	3970	110	31.93	8.90	20	TRA
245/70R19.5	133/131	14	L	7.50	4300	110	4540	110	33.03	9.76	20	TRA
245/70R19.5	135/133	16	L	7.50	4540	120	4805	120	33.03	9.76	20	TRA

Horizontal pattern provides tire excellent drive and braking performance.

Shoulder pattern groove and open pattern design with good tire heat dissipation.

Pattern block stiffener effectively restrains grinding block root tear and decorative pattern.

F816e+

STEER



F816e+ RADIAL TRUCK TIRE

Size	Load Index	PR	Speed Symbols	Standard Rim	Max load and max air (lbs&psi)				Overall Diameter (in)	Section Width (in)	Tread Depth (In 32nds)	Operation Norm
					Dual lbs	Dual psi	Single lbs	Single psi				
★ 11R22.5	144/142	14	M	8.25	5840	105	6175	105	41.50	10.98	18.3	TRA
★ 11R22.5	146/143	16	M	8.25	6005	120	6610	120	41.50	10.98	18.3	TRA
★ 11R24.5	146/143	14	M	8.25	6005	105	6610	105	43.46	10.98	18.3	TRA
★ 11R24.5	149/146	16	M	8.25	6610	120	7160	120	43.46	10.98	18.3	TRA
★ 285/75R24.5	144/141	14	M	8.25	5675	110	6175	110	41.34	11.14	18.3	TRA
★ 285/75R24.5	147/144	16	M	8.25	6175	120	6780	120	41.34	11.14	18.3	TRA
★ 295/75R22.5	144/141	14	M	9.00	5675	110	6175	110	39.92	11.73	18.3	TRA
★ 295/75R22.5	146/143	16	M	9.00	6005	120	6610	120	39.92	11.73	18.3	TRA

Good handling.

Low fuel consumption.

Certified by U.S.A SmartWay.

★: SmartWay

F816

TRAILER&STEER



F816 RADIAL TRUCK TIRE

Size	Load Index	PR	Speed Symbols	Standard Rim	Max load and max air (lbs&psi)				Overall Diameter (in)	Section Width (in)	Tread Depth (In 32nds)	Operation Norm
					Dual lbs	Dual psi	Single lbs	Single psi				
11R22.5	144/142	14	M	8.25	5840	105	6175	105	41.50	10.98	18.3	TRA
11R22.5	146/143	16	M	8.25	6005	120	6610	120	41.50	10.98	18.3	TRA
11R22.5	148/145	16	M	8.25	6390	123	6945	123	41.50	10.98	18.3	ETRTO
12R22.5	152/148	16	L	9.00	6945	123	7830	123	42.68	11.81	20.2	ETRTO
12R22.5	150/147	16	M	9.00	6780	120	7390	120	42.72	11.81	20.2	GB
12R22.5	152/149	18	L	9.00	7160	135	7830	135	42.72	11.81	20.2	GB
11R24.5	146/143	14	M	8.25	6005	105	6610	105	43.46	10.98	18.3	TRA
11R24.5	149/146	16	M	8.25	6610	120	7160	120	43.46	10.98	18.3	TRA
285/75R24.5	144/141	14	M	8.25	5675	110	6175	110	41.34	11.14	18.3	TRA
285/75R24.5	147/144	16	M	8.25	6175	120	6780	120	41.34	11.14	18.3	TRA
295/75R22.5	144/141	14	M	9.00	5675	110	6175	110	39.92	11.73	18.3	TRA
295/75R22.5	146/143	16	M	9.00	6005	120	6610	120	39.92	11.73	18.3	TRA

Special design for steer and trailer axle of trucks. | Good side-wear resistance. | High-speed performance.

Long life. | Retreadability. | Low eccentric wear.

T810

TRAILER



T810 RADIAL TRUCK TIRE

Size	Load Index	PR	Speed Symbols	Standard Rim	Max load and max air (lbs&psi)				Overall Diameter (in)	Section Width (in)	Tread Depth (In 32nds)	Operation Norm
					Dual lbs	Dual psi	Single lbs	Single psi				
11R22.5	144/142	14	M	8.25	5840	105	6175	105	41.50	10.98	13.5	TRA
11R22.5	146/143	16	M	8.25	6005	120	6610	120	41.50	10.98	13.5	TRA
11R24.5	146/143	14	M	8.25	6005	105	6610	105	43.46	10.98	13.5	TRA
11R24.5	149/146	16	M	8.25	6610	120	7160	120	43.46	10.98	13.5	TRA
255/70R22.5	140/137	16	M	7.50	5070	120	5510	120	36.61	10.04	13.5	TRA
285/75R24.5	144/141	14	M	8.25	5675	110	6175	110	41.34	11.14	13.5	TRA
285/75R24.5	147/144	16	M	8.25	6175	120	6780	120	41.34	11.14	13.5	TRA
295/75R22.5	144/141	14	M	9.00	5675	110	6175	110	39.92	11.73	13.5	TRA
295/75R22.5	146/143	16	M	9.00	6005	120	6610	120	39.92	11.73	13.5	TRA

Suitable for the trailer axle of the trucks running on the high-grade road.

ATL812

TRAILER



ATL812 RADIAL TRUCK TIRE

Size	Load Index	PR	Speed Symbols	Standard Rim	Max load and max air (lbs&psi)				Overall Diameter (in)	Section Width (in)	Tread Depth (In 32nds)	Operation Norm
					Dual lbs	Dual psi	Single lbs	Single psi				
9R22.5	136/134	14	M	6.75	4675	120	4940	120	38.35	9.02	18.3	TRA
10R22.5	141/139	14	M	7.50	5355	115	5675	115	40.12	10.00	18.9	TRA
11R22.5	144/142	14	M	8.25	5840	105	6175	105	41.50	10.98	20.2	TRA
11R22.5	146/143	16	M	8.25	6005	120	6610	120	41.50	10.98	20.2	TRA
11R22.5	148/145	16	M	8.25	6390	123	6945	123	41.34	10.98	20.2	ETRTO
12R22.5	152/148	16	L	9.00	6945	123	7830	123	42.68	11.81	21.4	ETRTO
12R22.5	152/149	18	L	9.00	7160	135	7830	135	42.72	11.81	21.4	GB
295/80R22.5	152/148	16	M	9.00	6945	123	7830	123	41.10	11.73	21.4	ETRTO
295/80R22.5	152/149	18	L	9.00	7160	130	7830	130	41.10	11.73	21.4	GB
295/80R22.5	154/149	18	M	9.00	7160	123	8270	123	41.10	11.73	21.4	ETRTO
315/80R22.5	154/150	18	M	9.00	7390	120	8270	120	42.36	12.28	17.6	ETRTO
315/80R22.5	156/150	20	L	9.00	7390	123	8820	123	42.36	12.28	17.6	ETRTO
285/70R19.5	140/137	16	M	8.25	5070	105	5510	105	35.24	11.14	20.2	ETRTO
285/70R19.5	146/144	18	M	8.25	6175	130	6610	130	35.24	11.14	20.2	ETRTO
285/70R19.5	150/148	18	J	8.25	6945	130	7390	130	35.24	11.14	20.2	ETRTO
275/70R22.5	148/145	16	M	8.25	6390	130	6945	130	37.72	10.87	20.2	ETRTO

Low fuel consumption. | Certified by U.S.A SmartWay.

★: SmartWay

T810e+

TRAILER



T810e+ RADIAL TRUCK TIRE

Size	Load Index	PR	Speed Symbols	Standard Rim	Max load and max air (lbs&psi)				Overall Diameter (in)	Section Width (in)	Tread Depth (In 32nds)	Operation Norm
					Dual lbs	Dual psi	Single lbs	Single psi				
★ 11R22.5	144/142	14	M	8.25	5840	105	6175	105	41.50	10.98	12.6	TRA
★ 11R22.5	146/143	16	M	8.25	6005	120	6610	120	41.50	10.98	12.6	TRA
★ 11R24.5	146/143	14	M	8.25	6005	105	6610	105	43.46	10.98	13.5	TRA
★ 11R24.5	149/146	16	M	8.25	6610	120	7160	120	43.46	10.98	13.5	TRA
★ 295/75R22.5	144/141	14	M	9.00	5675	110	6175	110	39.92	11.73	12.6	TRA
★ 295/75R22.5	146/143	16	M	9.00	6005	120	6610	120	39.92	11.73	12.6	TRA

Low fuel consumption. | Certified by U.S.A SmartWay.

★: SmartWay

LLF56+





ALL POSITION



LLF56+ RADIAL TRUCK TIRE

Size	Load Index	PR	Speed Symbols	Standard Rim	Max load and max air (lbs&psi)				Overall Diameter (in)	Section Width (in)	Tread Depth (In 32nds)	Operation Norm
					Dual lbs	Dual psi	Single lbs	Single psi				
9R22.5	133/131	12	M	6.75	4300	105	4540	105	38.35	9.02	17.0	TRA
9R22.5	136/134	14	M	6.75	4675	120	4940	120	38.35	9.02	17.0	TRA
10R22.5	141/139	14	M	7.50	5355	115	5675	115	40.12	10.00	17.6	TRA
10R22.5	144/142	14	L	7.50	5840	123	6175	123	40.12	10.00	17.6	ETRTO
10R22.5	144/142	16	L	7.50	5840	130	6175	130	40.12	10.00	17.6	GB

Suitable for all position axle of buses and trucks.

KTD301





DRIVE



KTD301 RADIAL TRUCK TIRE

Size	Load Index	PR	Speed Symbols	Standard Rim	Max load and max air (lbs&psi)				Overall Diameter (in)	Section Width (in)	Tread Depth (In 32nds)	Operation Norm
					Dual lbs	Dual psi	Single lbs	Single psi				
11R22.5	144/142	14	L	8.25	5840	105	6175	105	41.93	10.98	28.3	TRA
11R22.5	146/143	16	L	8.25	6005	120	6610	120	41.93	10.98	28.3	TRA
11R22.5	148/145	16	L	8.25	6390	123	6945	123	41.93	10.98	28.3	ETTRO
11R24.5	146/143	14	L	8.25	6005	105	6610	105	43.94	10.98	28.3	TRA
11R24.5	149/146	16	L	8.25	6610	120	7160	120	43.94	10.98	28.3	TRA

Typical block pattern design suitable for the drive axle of trucks.

Good braking and grip on the road.

LLA18





TRAILER&STEER



LLA18 RADIAL TRUCK TIRE

Size	Load Index	PR	Speed Symbols	Standard Rim	Max load and max air (lbs&psi)				Overall Diameter (in)	Section Width (in)	Tread Depth (In 32nds)	Operation Norm
					Dual lbs	Dual psi	Single lbs	Single psi				
385/65R22.5	158	18	K	11.75	---	---	9370	123	42.20	15.31	20.8	ETRTO
385/65R22.5	160	20	J	11.75	---	---	9915	130	42.20	15.31	20.8	ETRTO

Recommended for Regional applications.

Zig-zag groove tread design reduces stone retention.

LLA28





TRAILER&STEER



LLA28 RADIAL TRUCK TIRE

Size	Load Index	PR	Speed Symbols	Standard Rim	Max load and max air (lbs&psi)				Overall Diameter (in)	Section Width (in)	Tread Depth (In 32nds)	Operation Norm
					Dual lbs	Dual psi	Single lbs	Single psi				
425/65R22.5	162	18	K	12.25	---	---	10470	110	44.25	16.61	22.0	TRA
425/65R22.5	165	20	J/K	12.25	---	---	11400	120	44.25	16.61	22.0	ETRTO

Recommended for Regional applications.

Zig-zag groove tread design reduces stone retention.

Tread pattern delivers lateral traction in all weather conditions.

KTT306





TRAILER



KTT306 RADIAL TRUCK TIRE

Size	Load Index	PR	Speed Symbols	Standard Rim	Max load and max air (lbs&psi)				Overall Diameter (in)	Section Width (in)	Tread Depth (In 32nds)	Operation Norm
					Dual lbs	Dual psi	Single lbs	Single psi				
11R22.5	148/145	16	L	8.25	6390	123	6945	123	41.34	10.98	17.6	ETRTO

Low fuel consumption.

HAT technology: low heat generation.

Zigzag pattern design.

New technology for tire to reduce the weight.

F820

TRAILER&STEER



F820 *RADIAL TRUCK TIRE*

Size	Load Index	PR	Speed Symbols	Standard Rim	Max load and max air (lbs&psi)				Overall Diameter (in)	Section Width (in)	Tread Depth (In 32nds)	Operation Norm
					Dual lbs	Dual psi	Single lbs	Single psi				
8.5R17.5	121/120	12	M	6.00	3085	91	3195	91	31.57	8.46	16.4	ETRTO
205/75R17.5	124/122	14	M	6.00	3305	109	3525	109	29.65	8.03	15.7	ETRTO
215/75R17.5*	135/133	16	J/L	6.00	4540	123	4805	123	30.20	8.31	15.7	ETRTO
235/75R17.5*	141/140	16	L	6.75	5510	123	5675	123	31.38	9.17	16.4	ETRTO
235/75R17.5*	143/141	18	J	6.75	5675	127	6005	127	31.38	9.17	16.4	ETRTO
225/70R19.5	125/123	12	M	6.75	3415	95	3640	95	31.93	8.90	15.7	TRA
225/70R19.5	128/126	14	M	6.75	3750	110	3970	110	31.93	8.90	15.7	TRA
245/70R19.5	133/131	14	M	7.50	4300	110	4540	110	33.03	9.76	16.4	TRA
245/70R19.5	133/131	14	M	7.50	4300	109	4540	109	33.03	9.76	16.4	ETRTO
245/70R19.5	135/133	16	M	7.50	4540	120	4805	120	33.03	9.76	16.4	TRA
245/70R19.5	136/134	16	M	7.50	4675	120	4940	120	33.03	9.76	16.4	ETRTO
245/70R19.5	141/140	18	J	7.50	5510	123	5675	123	33.03	9.76	16.4	ETRTO
265/70R19.5	139/136	16	M	7.50	4940	120	5355	120	34.13	10.31	17.0	GB
265/70R19.5	140/138	16	M	7.50	5205	112	5510	112	34.13	10.31	17.0	ETRTO
265/70R19.5	143/141	18	J	7.50	5675	123	6005	123	34.13	10.31	17.0	ETRTO
285/70R19.5	144/142	16	M	8.25	5840	116	6175	116	35.24	11.14	17.6	ETRTO
285/70R19.5	146/144	18	M	8.25	6175	130	6610	130	35.24	11.14	17.6	ETRTO
285/70R19.5	150/147	18	J	8.25	6780	130	7390	130	35.24	11.14	17.6	ETRTO
255/70R22.5	140/137	16	M	7.50	5070	120	5510	120	36.61	10.04	17.6	TRA
255/70R22.5	140/137	16	M	7.50	5070	116	5510	116	36.61	10.04	17.6	ETRTO
275/70R22.5	148/145	16	M	8.25	6390	130	6945	130	37.72	10.87	18.3	ETRTO
275/70R22.5	150/148	18	M	8.25	6945	130	7390	130	37.72	10.87	18.3	ETRTO

* Low profile trailer

Suitable for all position axle of buses and medium trucks.

D905

DRIVE



D905 *RADIAL TRUCK TIRE*

Size	Load Index	PR	Speed Symbols	Standard Rim	Max load and max air (lbs&psi)				Overall Diameter (in)	Section Width (in)	Tread Depth (In 32nds)	Operation Norm
					Dual lbs	Dual psi	Single lbs	Single psi				
215/75R17.5	124/123	12	M	6.00	3415	100	3525	100	30.20	8.31	18.9	ETRTO
215/75R17.5	126/124	14	L/M	6.00	3525	102	3750	102	30.20	8.31	18.9	ETRTO
215/75R17.5	135/133	16	J/L	6.00	4540	123	4805	123	30.20	8.31	18.9	ETRTO
235/75R17.5	132/130	14	L/M	6.75	4190	112	4400	112	31.38	9.17	19.5	ETRTO
235/75R17.5	141/140	16	J	6.75	5510	123	5675	123	31.38	9.17	19.5	ETRTO
235/75R17.5	143/141	18	J	6.75	5675	127	6005	127	31.38	9.17	19.5	ETRTO
295/80R22.5	152/148	16	M	9.00	6945	123	7830	123	41.10	11.73	22.0	ETRTO
295/80R22.5	152/149	18	M	9.00	7160	130	7830	130	41.10	11.73	22.0	GB
285/70R19.5	146/144	18	M	8.25	6175	130	6610	130	35.24	11.14	20.2	ETRTO
285/70R19.5	150/148	18	J	8.25	6945	130	7390	130	35.24	11.14	20.2	ETRTO
275/70R22.5	148/145	16	M	8.25	6390	130	6945	130	37.72	10.87	22.0	ETRTO

Typical block pattern design suitable for the drive axle of trucks.

Good braking and grip on the road.

D928

DRIVE



D928 *RADIAL TRUCK TIRE*

Size	Load Index	PR	Speed Symbols	Standard Rim	Max load and max air (lbs&psi)				Overall Diameter (in)	Section Width (in)	Tread Depth (In 32nds)	Operation Norm
					Dual lbs	Dual psi	Single lbs	Single psi				
11R22.5	144/142	14	L	8.25	5840	105	6175	105	41.69	10.98	25.8	TRA
11R22.5	146/143	16	L	8.25	6005	120	6610	120	41.69	10.98	25.8	TRA
11R22.5	148/145	16	L	8.25	6390	123	6945	123	41.69	10.98	25.8	ETRTO
11R24.5	146/143	14	L	8.25	6005	105	6610	105	43.70	10.98	25.8	TRA
11R24.5	149/146	16	L	8.25	6610	120	7160	120	43.70	10.98	25.8	TRA
285/75R24.5	144/141	14	M	8.25	5675	110	6175	110	41.57	11.14	25.8	TRA
285/75R24.5	147/144	16	M	8.25	6175	120	6780	120	41.57	11.14	25.8	TRA
295/75R22.5	144/141	14	M	9.00	5675	110	6175	110	40.16	11.73	25.8	TRA
295/75R22.5	146/143	16	M	9.00	6005	120	6610	120	40.16	11.73	25.8	TRA

Typical block pattern design suitable for the drive axle of trucks.

Good braking and grip on the road.

LLF02

TRAILER&STEER



LLF02 RADIAL TRUCK TIRE

Size	Load Index	PR	Speed Symbols	Standard Rim	Max load and max air (lbs&psi)				Overall Diameter (in)	Section Width (in)	Tread Depth (In 32nds)	Operation Norm
					Dual lbs	Dual psi	Single lbs	Single psi				
12R22.5	152/148	16	L	9.00	6945	123	7830	123	42.68	11.81	18.3	ETRTO
13R22.5	156/150	18	L	9.75	7390	127	8820	127	44.25	12.60	20.8	ETRTO
295/80R22.5	152/148	16	M	9.00	6945	123	7830	123	41.10	11.73	18.3	ETRTO
295/80R22.5	152/149	18	M	9.00	7160	130	7830	130	41.10	11.73	18.3	GB
295/80R22.5	154/149	18	M	9.00	7160	123	8270	123	41.10	11.73	18.3	ETRTO
315/80R22.5	154/150	18	M	9.00	7390	120	8270	120	42.36	12.28	18.3	ETRTO
315/80R22.5	156/150	20	L	9.00	7390	123	8820	123	42.36	12.28	18.3	ETRTO
315/80R22.5	158/150(154/150)	22	L(M)	9.00	7390	130	9370	130	42.36	12.28	18.3	ETRTO

Special design for steer and trailer axle of trucks.

Good side-wear resistance.

High-speed performance.

AAL800

TRAILER&STEER



AAL800 RADIAL TRUCK TIRE

Size	Load Index	PR	Speed Symbols	Standard Rim	Max load and max air (lbs&psi)				Overall Diameter (in)	Section Width (in)	Tread Depth (In 32nds)	Operation Norm
					Dual lbs	Dual psi	Single lbs	Single psi				
12.00R24	156/153	18	K	8.5	8050	112	8820	112	48.27	12.32	18.9	ETRTO
12.00R24	160/156	20	K	8.5	8820	123	9915	123	48.27	12.32	18.9	ETRTO
11R22.5	146/143	16	L	8.25	6005	120	6610	120	41.50	10.98	20.2	TRA
11R22.5	148/145	16	L	8.25	6390	123	6945	123	41.34	10.98	20.2	ETRTO
12R22.5	152/148	16	L	9.00	6945	123	7830	123	42.68	11.81	20.2	ETRTO
12R22.5	152/149	18	K	9.00	7160	135	7830	135	42.72	11.81	20.2	GB
315/80R22.5	154/150	18	M	9.00	7390	120	8270	120	42.36	12.28	20.2	ETRTO
315/80R22.5	156/150	20	L	9.00	7390	123	8820	123	42.36	12.28	20.2	ETRTO

Suitable for all position axle of trucks running on the multi road.

KTA303

TRAILER&STEER



KTA303 RADIAL TRUCK TIRE

Size	Load Index	PR	Speed Symbols	Standard Rim	Max load and max air (lbs&psi)				Overall Diameter (in)	Section Width (in)	Tread Depth (In 32nds)	Operation Norm
					Dual lbs	Dual psi	Single lbs	Single psi				
9.5R17.5	143/141	18	M/J	6.75	5675	127	6005	127	33.15	9.45	14.5	ETRTO
215/75R17.5	126/124	14	L	6.00	3525	102	3750	102	30.20	8.31	15.1	ETRTO
215/75R17.5*	135/133	16	J	6.00	4540	123	4805	123	30.20	8.31	15.1	ETRTO
235/75R17.5*	143/141	18	J	6.75	5675	127	6005	127	31.38	9.17	15.7	ETRTO
11R22.5	148/145	16	L	8.25	6390	123	6945	123	41.34	10.98	17.6	ETRTO
12R22.5	152/148	16	L	9.00	6945	123	7830	123	42.68	11.81	18.9	ETRTO
12R22.5	152/149	18	L	9.00	7160	135	7830	135	42.72	11.81	18.9	GB
295/80R22.5	152/148	16	M	9.00	6945	123	7830	123	41.10	11.73	17.6	ETRTO
295/80R22.5	152/149	18	L	9.00	7160	130	7830	130	41.10	11.73	17.6	GB
315/80R22.5	156/150	20	L	9.00	7390	123	8820	123	42.36	12.28	17.6	ETRTO
265/70R19.5	143/141	18	J	7.50	5675	123	6005	123	34.13	10.31	15.7	ETRTO
385/65R22.5	160	20	K	11.75	——	——	9915	130	42.20	15.31	20.2	ETRTO

* Low profile trailer

Optimization of the shoulder block improves resistance to shoulder damage.

Lasting grip and stability with stone rejection design.

HAT technology: low heat generation.

KTT308

TRAILER



KTT308 RADIAL TRUCK TIRE

Size	Load Index	PR	Speed Symbols	Standard Rim	Max load and max air (lbs&psi)				Overall Diameter (in)	Section Width (in)	Tread Depth (In 32nds)	Operation Norm
					Dual lbs	Dual psi	Single lbs	Single psi				
11R22.5	148/145	16	L	8.25	6390	123	6945	123	41.34	10.98	17.6	ETRTO

Low fuel consumption.

HAT technology: low heat generation.

Stone rejection design.

New technology for tire to reduce the weight.

KTD303

DRIVE



KTD303 *RADIAL TRUCK TIRE*

Size	Load Index	PR	Speed Symbols	Standard Rim	Max load and max air (lbs&psi)				Overall Diameter (in)	Section Width (in)	Tread Depth (In 32nds)	Operation Norm
					Dual lbs	Dual psi	Single lbs	Single psi				
9.5R17.5	143/141	18	L	6.75	5675	127	6005	127	33.15	9.45	18.3	ETRTO
215/75R17.5	135/133	16	J	6.00	4540	123	4805	123	30.20	8.31	17.6	ETRTO
235/75R17.5	143/141	18	J	6.75	5675	127	6005	127	31.38	9.17	18.3	ETRTO
10.00R20	149/146	18	K	7.5	6610	135	7160	135	41.50	10.94	22.0	GB
295/80R22.5	152/148	16	M	9.00	6945	123	7830	123	41.10	11.73	21.4	ETRTO
295/80R22.5	152/149	18	L	9.00	7160	130	7830	130	41.10	11.73	21.4	GB
295/80R22.5	154/149	18	L	9.00	7160	123	8270	123	41.10	11.73	21.4	ETRTO
315/80R22.5	156/150	20	L	9.00	7390	123	8820	123	42.36	12.28	22.7	ETRTO
265/70R19.5	143/141	18	J	7.50	5675	123	6005	123	34.13	10.31	18.3	ETRTO

Optimization of the shoulder block improves resistance to shoulder damage.

Lasting grip and stability with stone rejection design.

HAT technology: low heat generation.

KTT307

TRAILER



KTT307 *RADIAL TRUCK TIRE*

Size	Load Index	PR	Speed Symbols	Standard Rim	Max load and max air (lbs&psi)				Overall Diameter (in)	Section Width (in)	Tread Depth (In 32nds)	Operation Norm
					Dual lbs	Dual psi	Single lbs	Single psi				
11R22.5	148/145	16	L	8.25	6390	123	6945	123	41.34	10.98	17.6	ETRTO
11R22.5	149/146	18	K	8.25	6610	135	7160	135	41.34	10.98	17.6	GB
295/80R22.5	154/149	18	L	9.00	7160	123	8270	123	41.10	11.73	17.6	ETRTO

Low fuel consumption.

HAT technology: low heat generation.

Stone rejection design.

New technology for tire to reduce the weight.

LLF02e+

STEER



LLF02e+ *RADIAL TRUCK TIRE*

Size	Load Index	PR	Speed Symbols	Standard Rim	Max load and max air (lbs&psi)				Overall Diameter (in)	Section Width (in)	Tread Depth (In 32nds)	Operation Norm
					Dual lbs	Dual psi	Single lbs	Single psi				
★ 315/80R22.5	154/151	18	M	9.00	7610	120	8270	120	42.36	12.28	18	TRA
★ 315/80R22.5	157/154	20	L	9.00	8270	130	9090	130	42.36	12.28	18	TRA

Good handling.

Low fuel consumption.

Certified by U.S.A SmartWay.

★: SmartWay

A928

TRAILER&STEER



A928 *RADIAL TRUCK TIRE*

Size	Load Index	PR	Speed Symbols	Standard Rim	Max load and max air (lbs&psi)				Overall Diameter (in)	Section Width (in)	Tread Depth (In 32nds)	Operation Norm
					Dual lbs	Dual psi	Single lbs	Single psi				
385/65R22.5	164	24	J	11.75	---	---	11000	130	42.20	15.31	21	ETRTO

suitable for all position axle of trucks

LLF86

ALL POSITION



LLF86 *RADIAL TRUCK TIRE*

Size	Load Index	PR	Speed Symbols	Standard Rim	Max load and max air (lbs&psi)				Overall Diameter (in)	Section Width (in)	Tread Depth (In 32nds)	Operation Norm
					Dual lbs	Dual psi	Single lbs	Single psi				
215/75R17.5	126/124	14	L/M	6.00	3525	102	3750	102	30.20	8.31	15.7	ETRTO
215/75R17.5*	135/133	16	J/L	6.00	4540	123	4805	123	30.20	8.31	15.7	ETRTO

*Low profile trailer

Suitable for medium trucks running on the high-grade road.

KJT016

DRIVE



KJT016 RADIAL TRUCK TIRE

Size	Load Index	PR	Speed Symbols	Standard Rim	Max load and max air (lbs&psi)				Overall Diameter (in)	Section Width (in)	Tread Depth (In 32nds)	Operation Norm
					Dual lbs	Dual psi	Single lbs	Single psi				
225/70R19.5	125/123	12	M	6.75	3415	95	3640	95	31.93	8.90	18.9	TRA
225/70R19.5	128/126	14	N	6.75	3750	110	3970	110	31.93	8.90	18.9	TRA

Aggressive zigzag center grooves and open shoulder grooves provide outstanding traction in mud and snow.

Stone rejectors protect the casing in base of the tread groove.

Protect ribs on both sidewalls to fight damage from curbing, cuts and abrasions

3D Sipes locks together under compression for the stability of a solid block.

Strong carcass materials help promote tire durability and provide tire retreadability.

AFL866

ALL POSITION



AFL866 RADIAL TRUCK TIRE

Size	Load Index	PR	Speed Symbols	Standard Rim	Max load and max air (lbs&psi)				Overall Diameter (in)	Section Width (in)	Tread Depth (In 32nds)	Operation Norm
					Dual lbs	Dual psi	Single lbs	Single psi				
205/65R17.5	129/127 (132/132)	16	J(G)	6.00	3860	130	4080	130	27.99	8.03	15.7	ETRTO
215/70R17.5	123/121	14	L	6.00	3415	112	3195	112	29.41	8.31	18.3	JATMA
245/70R17.5*	143/141	18	J	7.50	5675	127	6005	127	31.06	9.76	18.3	ETRTO
215/75R17.5	126/124	14	M	6.00	3525	102	3750	102	30.20	8.31	18.3	ETRTO
215/75R17.5*	135/133	16	J	6.00	4540	123	4805	123	30.20	8.31	18.3	ETRTO
235/75R17.5	132/130	14	M	6.75	4190	112	4400	112	31.38	9.17	18.3	ETRTO
235/75R17.5*	141/140	16	J	6.75	5510	123	5675	123	31.38	9.17	18.3	ETRTO
235/75R17.5*	143/141	18	J	6.75	5675	127	6005	127	31.38	9.17	18.3	ETRTO
225/80R17.5	123/122	14	L	6.75	3305	102	3415	102	31.69	8.90	20.2	JATMA
225/90R17.5	127/125	14	L	6.75	3640	102	3860	102	33.50	8.90	16.4	JATMA
225/90R17.5	128/126	16	L	6.75	3750	102	3970	102	33.50	8.90	16.4	JATMA

* Low profile trailer

Extra wide tread design for high mileage and even wear.

Zig-zag grooves for excellent handling.

Optimize structure design.

D955

DRIVE



D955 RADIAL TRUCK TIRE

Size	Load Index	PR	Speed Symbols	Standard Rim	Max load and max air (lbs&psi)				Overall Diameter (in)	Section Width (in)	Tread Depth (In 32nds)	Operation Norm
					Dual lbs	Dual psi	Single lbs	Single psi				
225/70R19.5	125/123	12	M	6.75	3415	95	3640	95	31.93	8.90	18.3	TRA
225/70R19.5	128/126	14	M	6.75	3750	110	3970	110	31.93	8.90	18.3	TRA
245/70R19.5	133/131	14	M	7.50	4300	110	4540	110	33.03	9.76	19.5	TRA
245/70R19.5	133/131	14	M	7.50	4300	109	4540	109	33.03	9.76	19.5	ETRTO
245/70R19.5	135/133	16	M	7.50	4540	120	4805	120	33.03	9.76	19.5	TRA
245/70R19.5	136/134	16	L	7.50	4675	120	4940	120	33.03	9.76	19.5	ETRTO

Suitable for medium trucks running on the normal road.

Good braking and grip on wet road.

LLA78

ALL POSITION



LLA78 RADIAL TRUCK TIRE

Size	Load Index	PR	Speed Symbols	Standard Rim	Max load and max air (lbs&psi)				Overall Diameter (in)	Section Width (in)	Tread Depth (In 32nds)	Operation Norm
					Dual lbs	Dual psi	Single lbs	Single psi				
235/75R17.5	132/130	14	L/M	6.75	4190	112	4400	112	31.38	9.17	16.4	ETRTO
235/75R17.5*	141/140	16	J	6.75	5510	123	5675	123	31.38	9.17	16.4	ETRTO
235/75R17.5*	143/141	18	J	6.75	5675	127	6005	127	31.38	9.17	16.4	ETRTO
245/70R17.5*	143/141	18	J	7.50	5675	127	6005	127	31.06	9.76	15.1	ETRTO

* Low profile trailer

Suitable for the trailer axle of the trucks running on the high-grade road.

ON&OFF ROAD

TRUCK TIRES TECHNICAL CATALOGUE

AAM31 RADIAL TRUCK TIRE 55
AAM32W RADIAL TRUCK TIRE 57
AAM33W RADIAL TRUCK TIRE 59
LLA08 RADIAL TRUCK TIRE 61
ADO912 RADIAL TRUCK TIRE 61
ADO986 RADIAL TRUCK TIRE 62
LLA08A RADIAL TRUCK TIRE 62
KMA400 RADIAL TRUCK TIRE 63
KXA400 RADIAL TRUCK TIRE 63
KMD401 RADIAL TRUCK TIRE 64
ADO986+ RADIAL TRUCK TIRE 64
KMA40 RADIAL TRUCK TIRE 65
M-A40A RADIAL TRUCK TIRE 65
D950 RADIAL TRUCK TIRE 66
KMA403 RADIAL TRUCK TIRE 66
AAR919 RADIAL TRUCK TIRE 67
LLA38 RADIAL TRUCK TIRE 67
KMD403 RADIAL TRUCK TIRE 68



AAM31 AAM32w AAM33w

AAM31

ALL POSITION

RADIAL TRUCK TIRE

ANTI CUTTING

WEAR-RESISTANT



MADE IN THAILAND

TEST RESULTS

SELLING POINTS OF TIRE PRODUCTS



Durable tread compound and robust shoulder designed for excellent wear resistance.



3-groove pattern combined with zigzag grooves offering outstanding traction and water drainage.



Center lug with diagonal sipes to promote traction in wet or dry conditions for the life of the tread.

AAM31 *RADIAL TRUCK TIRE*

Size	Load index& Speed symbols	PR	Load Index	Max load and max air (lbs&psi)				Overall Diameter in inches	Section Width in inches	Tread depth (In 32nds)
				Dual lbs	Dual psi	Single lbs	Single psi			
255/70R22.5	140/137M	16	H	5070	120	5510	120	36.54	10.16	17
11R22.5	146/143K	16	H	6005	120	6610	120	40.09	11.06	19
11R24.5	149/146K	16	H	6610	120	7610	120	43.06	11.06	19
315/80R22.5	157/154K	20	L	8270	130	9090	130	42.33	12.60	19
275/70R22.5	148/145L	18	J	6940	130	6395	130	37.68	10.55	19



AAM32w

ALL POSITION

RADIAL TRUCK TIRE


ANTI CUTTING

WEAR-RESISTANT



MADE IN THAILAND

TEST RESULTS

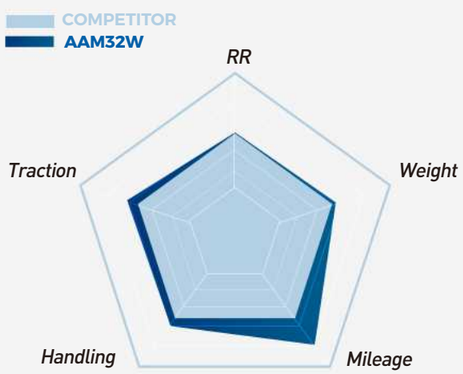

SELLING POINTS OF TIRE PRODUCTS



Durable tread compoundand robust shoulderdesigned for excellent wearresistance.



3-groove pattern combined with zigzag grooves offering outstanding traction and water drainage.



Center lug with diagonal sipes to promote traction in wet or dry conditions for the life of the tread.

AAM32W *RADIAL TRUCK TIRE*

Size	Load index& Speed symbols	PR	Load Index	Max load and max air (lbs&psi)				Overall Diameter in inches	Section Width in inches	Tread depth (In 32nds)
				Dual lbs	Dual psi	Single lbs	Single psi			
385/65R22.5	160K	20	L	-	-	9920	130	42.22	14.96	21
425/65R22.5	165K	20	L	-	-	11400	120	44.25	16.93	22



AAM33w

ALL POSITION

RADIAL TRUCK TIRE

ANTI CUTTING

WEAR-RESISTANT




TEST RESULTS

SELLING POINTS OF TIRE PRODUCTS



Open shoulder offers good traction while durable tread compound and robust shoulder block designed for excellent wear resistance.



Self-cleaning tread pattern provides high traction with stone rejector platforms in every groove for excellent durability.



Tread compounded and constructed to resist cuts and impacts in mixed service.

AAM33w RADIAL TRUCK TIRE

Size	Load index& Speed symbols	PR	Load Index	Max load and max air (lbs&psi)				Overall Diameter in inches	Section Width in inches	Tread depth (In 32nds)
				Dual lbs	Dual psi	Single lbs	Single psi			
385/65R22.5	160 K	20	L	---	---	9920	130	42.22	14.96	21



LLA08



ALL POSITION



LLA08 RADIAL TRUCK TIRE

Size	Load Index	PR	Speed Symbols	Standard Rim	Max load and max air (lbs&psi)				Overall Diameter (in)	Section Width (in)	Tread Depth (In 32nds)	Operation Norm
					Dual lbs	Dual psi	Single lbs	Single psi				
12.00R24	156/153	18	K	8.5	8050	112	8820	112	48.27	12.32	21.4	ETRTO
12.00R24	160/156	20	K	8.5	8820	123	9915	123	48.27	12.32	21.4	ETRTO
11R22.5	144/142	14	K	8.25	5840	105	6175	105	41.50	10.98	18.9	TRA
11R22.5	146/143	16	K	8.25	6005	120	6610	120	41.50	10.98	18.9	TRA
11R22.5	148/145	16	K	8.25	6390	123	6945	123	41.50	10.98	18.9	ETRTO
11R22.5	149/146	18	L/K	8.25	6610	135	7160	135	41.50	10.98	18.9	GB
12R22.5	152/148	16	K	9.00	6945	123	7830	123	42.68	11.81	21.4	ETRTO
12R22.5	152/149	18	K	9.00	7160	135	7830	135	42.72	11.81	21.4	GB
11R24.5	146/143	14	K	8.25	6005	105	6610	105	43.46	10.98	20.8	TRA
11R24.5	149/146	16	K	8.25	6610	120	7160	120	43.46	10.98	20.8	TRA
12R24.5	152/149	16	K	9.00	7160	120	7830	120	44.69	11.81	20.2	TRA
12R24.5	154/151	18	K	9.00	7610	135	8270	135	44.69	11.81	20.2	GB
255/70R22.5	140/137	16	M	7.50	5070	120	5510	120	36.61	10.04	16.0	TRA
295/80R22.5	152/148	16	K	9.00	6945	123	7830	123	41.10	11.73	20.2	ETRTO
295/80R22.5	154/149	18	K	9.00	7160	123	8270	123	41.10	11.73	20.2	ETRTO
315/80R22.5	154/150	18	M	9.00	7390	120	8270	120	42.36	12.28	22.0	ETRTO
315/80R22.5	156/150	20	L	9.00	7390	123	8820	123	42.36	12.28	22.0	ETRTO
315/80R22.5	158/150	22	L	9.00	7390	130	9370	130	42.36	12.28	22.0	ETRTO

Typical combined pattern. | Cut resistance compound. | Good braking and grip.

AD0912



DRIVE

AD0912 RADIAL TRUCK TIRE

Size	Load Index	PR	Speed Symbols	Standard Rim	Max load and max air (lbs&psi)				Overall Diameter (in)	Section Width (in)	Tread Depth (In 32nds)	Operation Norm
					Dual lbs	Dual psi	Single lbs	Single psi				
11R22.5	148/145	16	J	8.25	6390	123	6945	123	41.34	10.98	25.2	ETRTO
275/80R22.5	149/146	16	J	8.25	6610	123	7160	123	39.84	10.87	25.2	ETRTO
295/80R22.5	152/148	16	F	9.00	6945	123	7830	123	41.10	11.73	25.2	ETRTO

Good traction resistance. | Chip, cut and abrasion resistance tread compound. | Deep tread depth increases mileage and service life.

AD0986



DRIVE



AD0986 RADIAL TRUCK TIRE

Size	Load Index	PR	Speed Symbols	Standard Rim	Max load and max air (lbs&psi)				Overall Diameter (in)	Section Width (in)	Tread Depth (In 32nds)	Operation Norm
					Dual lbs	Dual psi	Single lbs	Single psi				
12.00R24	160/156	20	F	8.5	8820	123	9915	123	48.27	12.32	32.1	ETRTO
12.00R24	156/153	18	F	8.5	8050	112	8820	112	48.27	12.32	32.1	ETRTO
12.00R24	160/157	20	F	8.5	9095	130	9915	130	48.27	12.40	32.1	GB
12.00R24	158/155	18	F	8.5	8540	120	9370	120	48.27	12.40	32.1	GB
11R22.5	144/142	14	F	8.25	5840	105	6175	105	41.93	10.98	30.9	TRA
11R22.5	146/143	16	F	8.25	6005	120	6610	120	41.93	10.98	30.9	TRA
11R22.5	148/145	16	F	8.25	6390	123	6945	123	41.93	10.98	30.9	ETRTO
12R22.5	152/148	16	F	9.00	6945	123	7830	123	42.68	11.81	30.9	ETRTO
12R22.5	152/149	18	F	9.00	7160	135	7830	135	43.15	11.81	30.9	GB
13R22.5	156/150	18	F	9.75	7390	127	8820	127	44.25	12.60	30.9	ETRTO
11R24.5	146/143	14	F	8.25	6005	105	6610	105	43.94	10.98	30.9	TRA
11R24.5	149/146	16	F	8.25	6610	120	7160	120	43.94	10.98	30.9	TRA
295/80R22.5	152/148	16	F	9.00	6945	123	7830	123	41.10	11.73	30.9	ETRTO
295/80R22.5	152/149	18	F	9.00	7160	130	7830	130	41.34	11.73	30.9	GB
315/80R22.5	154/150	18	F	9.00	7390	120	8270	120	42.36	12.28	30.9	ETRTO
315/80R22.5	156/150	20	F	9.00	7390	123	8820	123	42.36	12.28	30.9	ETRTO

Off-road pattern block ensures powerful traction and good self-cleaning ability. | Chip, cut and abrasion resistance tread compound. | Deep tread depth increases mileage and service life.

LLA08A



ALL POSITION



LLA08A RADIAL TRUCK TIRE

Size	Load Index	PR	Speed Symbols	Standard Rim	Max load and max air (lbs&psi)				Overall Diameter (in)	Section Width (in)	Tread Depth (In 32nds)	Operation Norm
					Dual lbs	Dual psi	Single lbs	Single psi				
275/80R22.5	147/144	16	K	8.25	6175	120	6780	120	39.84	10.87	20	GB
275/80R22.5	149/146	16	K	8.25	6610	123	7160	123	39.84	10.87	20	ETTRO
275/80R22.5	149/146	18	K	8.25	6610	130	7160	130	39.84	10.87	20	GB

Typical combined pattern. | Cut resistance compound. | Good braking and grip.

KMA400



ALL POSITION



KMA400 RADIAL TRUCK TIRE

Size	Load Index	PR	Speed Symbols	Standard Rim	Max load and max air (lbs&psi)				Overall Diameter (in)	Section Width (in)	Tread Depth (In 32nds)	Operation Norm
					Dual lbs	Dual psi	Single lbs	Single psi				
295/80R22.5	152/149	18	K	9.00	7160	130	7830	130	41.10	11.73	23.9	GB
13R22.5	156/150	18	K	9.75	7390	127	8820	127	44.25	12.60	23.9	ETRTO
13R22.5	158/156	20	K	9.75	8820	130	9370	130	44.25	12.60	23.9	ETRTO
295/80R22.5	152/148	16	K	9.00	6945	123	7830	123	41.10	11.73	23.9	ETRTO
315/80R22.5	154/150	18	K	9.00	7390	120	8270	120	42.36	12.28	23.9	ETRTO
315/80R22.5	156/150	20	K	9.00	7385	123	8820	123	42.36	12.28	23.9	ETRTO
425/65R22.5	165	20	K	12.25	---	---	11400	120	44.25	16.93	23.3	ETRTO
445/65R22.5	169	20	J/K	13.00	---	---	12800	130	45.28	17.87	23.3	ETRTO

Thick sidewall design protects against sidewall impacts and bruises.

Stone rejection design protects groove bottom from stone puncture.

Lasting grip and stability with M+S and 3PMSF marking.

KMD401



DRIVE



KMD401 RADIAL TRUCK TIRE

Size	Load Index	PR	Speed Symbols	Standard Rim	Max load and max air (lbs&psi)				Overall Diameter (in)	Section Width (in)	Tread Depth (In 32nds)	Operation Norm
					Dual lbs	Dual psi	Single lbs	Single psi				
9.5R17.5	143/141	18	J	6.75	5675	127	6005	127	33.35	9.45	20.8	ETRTO
11R22.5	146/143	16	L	8.25	6005	120	6610	120	41.50	10.98	25.8	TRA
11R22.5	148/145	16	L	8.25	6390	123	6945	123	41.34	10.98	25.8	ETRTO
11R24.5	149/146	16	L	8.25	6610	120	7160	120	43.46	10.98	28.3	TRA
215/75R17.5	135/133	18	J	6.00	4540	123	4805	123	30.47	8.31	18.9	ETRTO
235/75R17.5	143/141	18	J	6.75	5675	127	6005	127	31.54	9.17	20.2	ETRTO
295/80R22.5	152/148	16	L	9.00	6945	123	7830	123	41.10	11.73	25.8	ETRTO
295/80R22.5	152/149	18	L	9.00	7160	130	7830	130	41.10	11.73	25.8	GB

Chip, cut and abrasion resistance tread compound.

Stone rejection design protects groove bottom from stone puncture.

Deep tread depth increases mileage and service life.

KXA400



ALL POSITION



KXA400 RADIAL TRUCK TIRE

Size	Load Index	PR	Speed Symbols	Standard Rim	Max load and max air (lbs&psi)				Overall Diameter (in)	Section Width (in)	Tread Depth (In 32nds)	Operation Norm
					Dual lbs	Dual psi	Single lbs	Single psi				
385/65R22.5	158	18	L	11.75	---	---	9370	123	42.20	15.31	22.7	ETRTO
385/65R22.5	160(158)	20	K(L)	11.75	---	---	9915	130	42.20	15.31	22.7	ETRTO
385/65R22.5	164	24	J	11.75	---	---	11000	130	42.20	15.31	22.7	ETRTO
425/65R22.5	165	20	K	12.25	---	---	11400	120	44.25	16.61	23.3	ETRTO

Thick sidewall design protects against sidewall impacts and bruises.

Stone rejection design protects groove bottom from stone puncture.

Lasting grip and stability with M+S marking.

AD0986+



DRIVE



AD0986+ RADIAL TRUCK TIRE

Size	Load Index	PR	Speed Symbols	Standard Rim	Max load and max air (lbs&psi)				Overall Diameter (in)	Section Width (in)	Tread Depth (In 32nds)	Operation Norm
					Dual lbs	Dual psi	Single lbs	Single psi				
12.00R20	158/155	22	B	8.5	8540	140	9370	140	44.72	12.40	40.3	CAS
12.00R24	158/155	18	F	8.5	8540	120	9370	120	48.74	12.40	40.3	GB/TRA
12.00R24	160/157	20	F	8.5	9095	130	9915	130	48.74	12.40	40.3	GB
12.00R24	162/158	22	B	8.5	9370	130	10470	130	48.74	12.40	40.3	——

Off-road pattern block ensures powerful traction and good self-cleaning ability.

Chip, cut and abrasion resistance tread compound.

Deep tread depth and wide tread width increase mileage and service life.

KMA40

ALL POSITION



KMA40 RADIAL TRUCK TIRE

Size	Load Index	PR	Speed Symbols	Standard Rim	Max load and max air (lbs&psi)				Overall Diameter (in)	Section Width (in)	Tread Depth (In 32nds)	Operation Norm
					Dual lbs	Dual psi	Single lbs	Single psi				
11R22.5	146/143	16	L	8.25	6005	120	6610	120	41.50	10.98	23.1	TRA
11R24.5	149/146	16	L	8.25	6610	120	7160	120	43.46	10.98	23.1	TRA

Chip, cut and abrasion resistance tread compound.

Stone rejection design protects groove bottom from stone puncture.

Deep tread depth increases mileage and service life.

M-A40A

ALL POSITION



M-A40A RADIAL TRUCK TIRE

Size	Load Index	PR	Speed Symbols	Standard Rim	Max load and max air (lbs&psi)				Overall Diameter (in)	Section Width (in)	Tread Depth (In 32nds)	Operation Norm
					Dual lbs	Dual psi	Single lbs	Single psi				
275/80R22.5	147/144	16	K	8.25	6175	120	6780	120	39.84	10.87	18	GB
275/80R22.5	149/146	18	K	8.25	6610	130	7160	130	39.84	10.87	18	GB
275/80R22.5	149/146	18	K	8.25	6610	123	7160	123	39.84	10.87	18	ETTRO

Anti wear and tear compound system ensures the anti-wear performance.

Longitudinal zig-zag pattern together with the transverse sipe enhance traction performance on mixed roads.

Pattern with high saturation ratio guarantee the wear performance.

D950

DRIVE



D950 RADIAL TRUCK TIRE

Size	Load Index	PR	Speed Symbols	Standard Rim	Max load and max air (lbs&psi)				Overall Diameter (in)	Section Width (in)	Tread Depth (In 32nds)	Operation Norm
					Dual lbs	Dual psi	Single lbs	Single psi				
11R22.5	144/142	14	K	8.25	5840	105	6175	105	41.93	10.98	29.0	TRA
11R22.5	146/143	16	K	8.25	6005	120	6610	120	41.93	10.98	29.0	TRA
11R24.5	146/143	14	F/G	8.25	6005	105	6610	105	43.94	10.98	31.4	TRA
11R24.5	149/146	16	F/G	8.25	6610	120	7160	120	43.94	10.98	31.4	TRA
285/75R24.5	147/144	16	J	8.25	6175	120	6780	120	41.81	11.14	29.0	TRA
295/75R22.5	146/143	16	J	9.00	6005	120	6610	120	40.39	11.73	29.0	TRA

Drive axle for on/off road conditions.

Deep and rigid block design for good traction.

Cut resistance compound.

Used for logging conditions where high traction required.

KMA403

ALL POSITION



KMA403 RADIAL TRUCK TIRE

Size	Load Index	PR	Speed Symbols	Standard Rim	Max load and max air (lbs&psi)				Overall Diameter (in)	Section Width (in)	Tread Depth (In 32nds)	Operation Norm
					Dual lbs	Dual psi	Single lbs	Single psi				
12.00R24	156/153	18	K	8.5	8050	112	8820	112	48.27	12.32	19.5	ETRTO
12.00R24	160/156	20	K	8.5	8820	123	9915	123	48.27	12.32	19.5	ETRTO
11R22.5	148/145	16	K	8.25	6390	123	6945	123	41.50	10.98	17.6	ETRTO
295/80R22.5	154/149	18	K	9.00	7160	123	8270	123	41.10	11.73	18.9	ETRTO
315/80R22.5	156/150	20	K	9.00	7390	123	8820	123	42.36	12.28	19.5	ETRTO
385/65R22.5	160	20	K	11.75	---	---	9915	130	42.20	15.31	20.2	ETRTO
385/65R22.5	164	24	G	11.75	---	---	11000	130	42.20	15.31	20.2	ETRTO

Thick sidewall design protects against sidewall impacts and bruises.

Stone rejection design protects groove bottom from stone puncture.

HAT technology: low heat generation.

AAR919



ALL POSITION



AAR919 RADIAL TRUCK TIRE

Size	Load Index	PR	Speed Symbols	Standard Rim	Max load and max air (lbs&psi)				Overall Diameter (in)	Section Width (in)	Tread Depth (In 32nds)	Operation Norm
					Dual lbs	Dual psi	Single lbs	Single psi				
11R22.5	146/143	16	J	8.25	6005	120	6610	120	41.50	10.98	23.9	TRA
11R22.5	148/145	16	K	8.25	6390	123	6945	123	41.34	10.98	23.9	ETRTO
325/95R24	162/160	22	K	9.0	9915	123	10470	123	48.35	12.80	22.7	ETRTO

Pattern block design reduces shoulder heat.

Wide running surface and higher saturation design improve the wear mileage.

Powerful traction, grip and climbing performance.

LLA38



ALL POSITION



LLA38 RADIAL TRUCK TIRE

Size	Load Index	PR	Speed Symbols	Standard Rim	Max load and max air (lbs&psi)				Overall Diameter (in)	Section Width (in)	Tread Depth (In 32nds)	Operation Norm
					Dual lbs	Dual psi	Single lbs	Single psi				
385/55R22.5	158	18	L	12.25	---	---	9370	123	39.21	15.20	20.8	ETRTO
385/55R22.5	160	20	J	12.25	---	---	9915	130	39.21	15.20	20.8	ETRTO
385/65R22.5	158	18	K	11.75	---	---	9370	123	42.20	15.31	20.8	ETRTO
385/65R22.5	160	20	J/K	11.75	---	---	9915	130	42.20	15.31	20.8	ETRTO
385/65R22.5	164	24	J	11.75	---	---	11000	130	42.20	15.31	20.8	ETRTO
425/65R22.5	162	18	K	12.25	---	---	10470	110	44.25	16.61	22.0	TRA
425/65R22.5	165	20	J/K	12.25	---	---	11400	120	44.25	16.61	22.0	ETRTO
445/65R22.5	168	20	J/K	13.00	---	---	12300	120	45.28	17.48	22.7	TRA
445/65R22.5	169	20	J	13.00	---	---	12800	130	45.28	17.48	22.7	ETRTO

Typical combined pattern.

Cut resistance compound.

Good braking and grip.

KMD403



DRIVE



KMD403 RADIAL TRUCK TIRE

Size	Load Index	PR	Speed Symbols	Standard Rim	Max load and max air (lbs&psi)				Overall Diameter (in)	Section Width (in)	Tread Depth (In 32nds)	Operation Norm
					Dual lbs	Dual psi	Single lbs	Single psi				
12.00R24	160/156	20	K	8.5	8820	123	9915	123	48.27	12.32	23.9	ETRTO
295/80R22.5	154/149	18	K	9.00	7160	123	8270	123	41.10	11.73	23.3	ETRTO
315/80R22.5	154/150	18	L	9.00	7390	120	8270	120	42.36	12.28	23.9	ETRTO
315/80R22.5	156/150	20	K	9.00	7390	123	8820	123	42.36	12.28	23.9	ETRTO

Thick sidewall design protects against sidewall impacts and bruises.

Stone rejection design protects groove bottom from stone puncture.

HAT technology: low heat generation.



COACH& URBAN

TRUCK TIRES TECHNICAL CATALOGUE

AAU609 *RADIAL TRUCK TIRE* 71

AAU609



ALL POSITION



AAU609 RADIAL TRUCK TIRE

Size	Load Index	PR	Speed Symbols	Standard Rim	Max load and max air (lbs&psi)				Overall Diameter (in)	Section Width (in)	Tread Depth (In 32nds)	Operation Norm
					Dual lbs	Dual psi	Single lbs	Single psi				
11R22.5	148/145	16	J	8.25	6390	123	6945	123	41.34	10.98	26.5	ETRTO
245/70R19.5	129/127	12	J	7.50	4080	95	3860	95	33.03	9.76	20.2	TRA
245/70R19.5	133/131	14	J	7.50	4540	110	4300	110	33.03	9.76	20.2	TRA
245/70R19.5	133/131	14	J	7.50	4540	109	4300	109	33.03	9.76	20.2	ETRTO
245/70R19.5	135/133	16	J	7.50	4805	120	4540	120	33.03	9.76	20.2	TRA
245/70R19.5	136/134	16	J	7.50	4940	120	4675	120	33.03	9.76	20.2	ETRTO
275/70R22.5	148/145	16	J	8.25	6390	130	6945	130	37.72	10.87	26.5	ETRTO
275/70R22.5	148/145 (152/148)	16	J(E)	8.25	6390	130	6945	130	37.72	10.87	26.5	ETRTO
275/70R22.5	150/148(152/148)	18	J(F)	8.25	6945	130	7390	130	37.72	10.87	26.5	ETRTO
305/70R22.5	152/150 (154/150)	20	J(F)	9.00	7390	130	7830	130	39.37	12.01	26.5	ETRTO

Enhanced sidewall ensures high safety.

Tire strength is increased by 35%, with application of ST steel cord.

Tire bead cracking is prevented, with application fiber layer in bead area.





WINTER

TRUCK TIRES TECHNICAL CATALOGUE

ADW807 RADIAL TRUCK TIRE 75
KWD600 RADIAL TRUCK TIRE 75
ADW808 RADIAL TRUCK TIRE 76
AFW806 RADIAL TRUCK TIRE 77
KWT600 RADIAL TRUCK TIRE 78
KWD601 RADIAL TRUCK TIRE 78
KWD700 RADIAL TRUCK TIRE 79
AS-A10 RADIAL TRUCK TIRE 79

ADW807

DRIVE



ADW807 RADIAL TRUCK TIRE

Size	Load Index	PR	Speed Symbols	Standard Rim	Max load and max air (lbs&psi)				Overall Diameter (in)	Section Width (in)	Tread Depth (In 32nds)	Operation Norm
					Dual lbs	Dual psi	Single lbs	Single psi				
11R22.5	146/143	16	M	8.25	6005	116	6610	116	41.50	10.98	25.2	JATMA
11R22.5	146/143	16	M	8.25	6005	120	6610	120	41.50	10.98	25.2	TRA
11R22.5	148/145	16	L	8.25	6390	123	6945	123	41.50	10.98	25.2	ETRTO
315/70R22.5	154/150	16	L	9.00	7390	130	8270	130	39.92	12.28	25.2	ETRTO
295/80R22.5	152/148	16	K	9.00	6945	123	7830	123	41.10	11.73	25.2	ETRTO
295/80R22.5	150/147	16	K	9.00	6780	120	7390	120	41.10	11.73	25.2	GB
315/80R22.5	154/150	18	M	9.00	7390	120	8270	120	42.36	12.28	25.2	ETRTO
315/80R22.5	156/150	20	L	9.00	7390	123	8820	123	42.36	12.28	25.2	ETRTO

High safety and good handling.

Optimized rib contact combats uneven wear and improves wet handling and braking.

Long life.

KWD600

DRIVE



KWD600 RADIAL TRUCK TIRE

Size	Load Index	PR	Speed Symbols	Standard Rim	Max load and max air (lbs&psi)				Overall Diameter (in)	Section Width (in)	Tread Depth (In 32nds)	Operation Norm
					Dual lbs	Dual psi	Single lbs	Single psi				
295/80R22.5	152/148	16	M	9.00	6945	123	7830	123	41.10	11.73	25.8	ETRTO
315/70R22.5	154/150(152/148)	16	L(M)	9.00	7390	130	8270	130	39.92	12.28	25.2	ETRTO
315/70R22.5	156/150(154/150)	18	L(M)	9.00	7390	130	8820	130	39.92	12.28	25.2	ETRTO
315/80R22.5	154/150	18	M	9.00	7390	120	8270	120	42.36	12.28	27.7	ETRTO
315/80R22.5	156/150(154/150)	20	L/M	9.00	7390	123	8820	123	42.36	12.28	27.7	ETRTO

Lasting grip and stability with M+S and 3PMSF marking.

Optimized rib contact combats uneven wear and improves wet handling and braking.

ADW808

DRIVE



ADW808 RADIAL TRUCK TIRE

Size	Load Index	PR	Speed Symbols	Standard Rim	Max load and max air (lbs&psi)				Overall Diameter (in)	Section Width (in)	Tread Depth (In 32nds)	Operation Norm
					Dual lbs	Dual psi	Single lbs	Single psi				
245/70R17.5	134/132	14	M	7.50	4400	112	4675	112	31.06	9.76	18.9	ETRTO
245/70R17.5	136/134	16	M	7.50	4675	123	4940	123	31.06	9.76	18.9	ETRTO
245/70R17.5	143/141	18	L	7.50	5675	127	6005	127	31.06	9.76	18.9	ETRTO
225/70R19.5	125/123	12	M	6.75	3415	95	3640	95	31.93	8.90	17.0	GB
225/70R19.5	128/126	14	M	6.75	3750	110	3970	110	31.93	8.90	17.0	GB
215/75R17.5	126/124	14	M	6.00	3525	102	3750	102	30.20	8.31	16.4	ETRTO
215/75R17.5	135/133	16	J	6.00	4540	123	4805	123	30.20	8.31	16.4	ETRTO
215/75R17.5	125/122	14	L	6.00	3305	110	3640	110	30.20	8.31	16.4	GB
215/75R17.5	127/124	16	J	6.00	3525	120	3860	120	30.20	8.31	16.4	GB
235/75R17.5	132/130	14	M	6.75	4190	112	4400	112	31.38	9.17	17.6	ETRTO
235/75R17.5	141/140	16	J	6.75	5510	123	5675	123	31.38	9.17	17.6	ETRTO
235/75R17.5	143/141	18	J	6.75	5675	127	6005	127	31.38	9.17	17.6	ETRTO
235/75R17.5	129/126	14	L	6.75	3750	110	4080	110	31.38	9.17	17.6	GB
235/75R17.5	132/129	16	J	6.75	4080	120	4400	120	31.38	9.17	17.6	GB

High safety and good handling.

Optimized rib contact combats uneven wear and improves wet handling and braking.

Long life.

AFW806



ALL POSITION



AFW806 RADIAL TRUCK TIRE

Size	Load Index	PR	Speed Symbols	Standard Rim	Max load and max air (lbs&psi)				Overall Diameter (in)	Section Width (in)	Tread Depth (In 32nds)	Operation Norm
					Dual lbs	Dual psi	Single lbs	Single psi				
11R22.5	146/143	16	M	8.25	6005	116	6610	116	41.50	10.98	18.9	JATMA
11R22.5	146/143	16	M	8.25	6005	120	6610	120	41.50	10.98	18.9	TRA
11R22.5	148/145	16	L	8.25	6390	123	6945	123	41.50	10.98	18.9	ETRTO
11R24.5	146/143	14	M	8.25	6005	105	6610	105	43.46	10.98	18.9	TRA
11R24.5	149/146	16	M	8.25	6610	120	7160	120	43.46	10.98	18.9	TRA
385/65R22.5	160(158)	20	J(L)	11.75	---	---	9915	130	42.20	15.31	20.8	ETRTO
275/70R22.5	148/145	16	M	8.25	6390	130	6945	130	37.72	10.87	18.9	ETRTO
275/70R22.5	144/141	16	M	8.25	5675	120	6175	120	37.72	10.87	18.9	GB
315/70R22.5	154/150	16	L	9.00	7390	130	8270	130	39.92	12.28	18.9	ETRTO
295/75R22.5	144/141	14	M	9.00	5675	110	6175	110	40.39	11.73	18.9	TRA
295/75R22.5	146/143	16	M	9.00	6005	120	6610	120	40.39	11.73	18.9	TRA
295/80R22.5	152/148	16	K	9.00	6945	123	7830	123	41.10	11.73	18.9	ETRTO
295/80R22.5	150/147	16	K	9.00	6780	120	7390	120	41.10	11.73	18.9	GB
315/80R22.5	154/150	18	M	9.00	7390	120	8270	120	42.36	12.28	18.9	ETRTO
315/80R22.5	156/150(154/150)	20	L/M	9.00	7390	123	8820	123	42.36	12.28	18.9	ETRTO

High safety and good handling.

Optimized rib contact combats uneven wear and improves wet handling and braking.

Low noise.

KWT600



TRAILER



KWT600 RADIAL TRUCK TIRE


Size	Load Index	PR	Speed Symbols	Standard Rim	Max load and max air (lbs&psi)				Overall Diameter (in)	Section Width (in)	Tread Depth (In 32nds)	Operation Norm
					Dual lbs	Dual psi	Single lbs	Single psi				
385/55R22.5	158	18	L	12.25	---	---	9365	123	39.21	15.20	18.3	ETRTO
385/55R22.5	160(158)	20	K(L)	12.25	---	---	9915	130	39.21	15.20	18.3	ETRTO
385/65R22.5	160(158)	20	K(L)	11.75	---	---	9920	130	42.20	15.31	19.5	ETRTO
385/65R22.5	164(158)	24	K(L)	11.75	---	---	11000	130	42.20	15.31	19.5	ETRTO

For trailer axle of trucks under snow condition use only.

Lasting grip and stability with M+S and 3PMSF marking.

Optimized rib contact combats uneven wear and improves wet handling and braking.

KWD601



ALL POSITION



KWD601 RADIAL TRUCK TIRE

Size	Load Index	PR	Speed Symbols	Standard Rim	Max load and max air (lbs&psi)				Overall Diameter (in)	Section Width (in)	Tread Depth (In 32nds)	Operation Norm
					Dual lbs	Dual psi	Single lbs	Single psi				
245/70R19.5	129/127	12	M	7.50	4080	95	3860	95	33.03	9.76	18.3	TRA
245/70R19.5	133/131	14	M	7.50	4540	110	4300	110	33.03	9.76	18.3	TRA
245/70R19.5	133/131	14	M	7.50	4540	109	4300	109	33.03	9.76	18.3	ETRTO
245/70R19.5	135/133	16	M	7.50	4805	120	4540	120	33.03	9.76	18.3	TRA
245/70R19.5	136/134	16	M	7.50	4940	120	4675	120	33.03	9.76	18.3	ETRTO

High safety and good handling.

Optimized rib contact combats uneven wear and improves wet handling and braking.

Long life.

KWD700

DRIVE



KWD700 *RADIAL TRUCK TIRE*

Size	Load Index	PR	Speed Symbols	Standard Rim	Max load and max air (lbs&psi)				Overall Diameter (in)	Section Width (in)	Tread Depth (In 32nds)	Operation Norm
					Dual lbs	Dual psi	Single lbs	Single psi				
11R22.5	146/143	16	L	8.25	6005	120	6610	120	41.93	10.98	27.1	TRA
11R24.5	149/146	16	L	8.25	6610	120	7160	120	43.94	10.98	27.1	TRA
295/75R22.5	146/143	16	L	9.00	6005	120	6610	120	40.24	11.53	26	TRA

3D Kerf technology provides excellent traction and long original tread life.

Optimizes the footprint for even wear and long tread life.

Long life, low rolling resistance.

Wide tread design and combined structure of rib and block pattern provides stability, longer mileage, and better handling performance in all weather conditions.

Strong carcass materials help promote tire durability and provide tire retreadability.

AS-A10

ALL POSITION



AS-A10 *RADIAL TRUCK TIRE*

Size	Load Index	PR	Speed Symbols	Standard Rim	Max load and max air (lbs&psi)				Overall Diameter (in)	Section Width (in)	Tread Depth (In 32nds)	Operation Norm
					Dual lbs	Dual psi	Single lbs	Single psi				
245/70R19.5	136/134	16	L	7.50	4675	123	4940	123	33.03	9.76	23	JATMA
		16	L									

High safety and good handling with M+S and All Season marking.

Optimized rib contact combats uneven wear and improves wet handling and braking.

Long life.



SPECIAL TRAILER

TRUCK TIRES TECHNICAL CATALOGUE

AST21 RADIAL TRUCK TIRE 83
AST22 RADIAL TRUCK TIRE 85



AST21 AST22

AST21

TRAILER

ALL STEEL ST TIRE



WEAR RESISTANCE

PROMOTE TIRE DURABILITY


MADE IN THAILAND

TEST RESULTS

SELLING POINTS OF TIRE PRODUCTS



Closed shoulder promoted uniform wear and improved rolling resistance.



Micro sipes on groove edges resists abnormal or "river wear".



Stone rejector platforms in center groove for excellent durability.

AST21 ALL STEEL ST TIRE

Size	Load index& Speed symbols	PR	Load Index	Max load and max air (lbs&psi)				Overall Diameter in inches	Section Width in inches	Tread depth (In 32nds)
				Dual lbs	Dual psi	Single lbs	Single psi			
ST205/75R15	115/110N	14	G	2335	95	2680	95	26.93	7.95	10
ST225/75R15	123/119L	14	G	3000	110	3420	110	27.95	8.78	10
ST225/75R15	121/117M	12	F	2835	95	3195	95	27.95	8.78	10
ST225/90R16	132/127M	14	G	3860	110	4400	110	31.34	8.66	10
ST235/80R16	129/125M	14	G	3640	110	4080	110	30.39	9.02	10
ST235/80R16	130/126M	16	H	3750	115	4190	115	30.39	9.02	10
ST235/85R16	132/127M	14	G	3860	110	4400	110	31.26	9.05	11
ST235/85R16	133/128M	16	H	3970	120	4540	120	31.26	9.05	11



AST22

TRAILER

ALL STEEL ST TIRE



WEAR RESISTANCE

PROMOTE TIRE DURABILITY

MADE IN THAILAND

TEST RESULTS

SELLING POINTS OF TIRE PRODUCTS



Closed shoulder promoted uniform wear and improved rolling resistance



Micro sipes on groove edges resists abnormal or "river wear", enhances heat dissipation



Stone rejector platforms in center groove for excellent durability

AST22 ALL STEEL ST TIRE

Size	Load index& Speed symbols	PR	Load Index	Max load and max air (lbs&psi)				Overall Diameter in inches	Section Width in inches	Tread depth (In 32nds)
				Dual lbs	Dual psi	Single lbs	Single psi			
ST205/75R15	115/110N	14	G	2335	95	2680	95	26.93	7.95	10
ST225/75R15	123/119L	14	G	3000	110	3420	110	27.95	8.78	10
ST225/75R15	121/117M	12	F	2835	95	3195	95	27.95	8.78	10
ST225/90R16	132/127M	14	G	3860	110	4400	110	31.34	8.66	10
ST235/80R16	129/125M	14	G	3640	110	4080	110	30.39	9.02	10
ST235/80R16	130/126M	16	H	3750	115	4190	115	30.39	9.02	10
ST235/85R16	132/127M	14	G	3860	110	4400	110	31.26	9.05	11
ST235/85R16	133/128M	16	H	3970	120	4540	120	31.26	9.05	11



Replacement Market Tires Warranty Manual

Warranty Eligibility

This limited warranty applies to all the qualified replacement market Truck and Bus Tires produced by Shandong Linglong Tyre Co., Ltd. and all its subsidiaries. This Limited Warranty only applies to the original purchaser, and the tire has a complete brand identification, DOT or barcode . and it is valid if all of the following apply:

- The tires are manufactured after January 1, 2025, and are shipped to North America for sale and use.
- The tire fails due to the workmanship or materials.
- The tire shall not exceed the warranty period, and the remaining pattern shall not be less than TWI.

What Is Warranted and for How Long

- The warranty period is 6 years from the date of tire production， and the remaining pattern depth is not less than TWI .
- If the tire fails due to manufacturing reasons and meets the warranty scope and conditions, the remaining pattern exceeds TWI, the new tire of the same specification will be covered free of charge.

What Is Not Warranted

1. Road hazard injuries or damages caused by obstacles or debris, such as cuts, punctures (whether repairable or not), snags, bruises, tears, abrasions or impact breaks.

2. Improper repairs or repairs that have failed.

3. Improper inflation or other maintenance abuses.

4. Improper mounting/dismounting.

5. Mechanical irregularities such as bent wheel assemblies, misalignment worn or faulty components.

6. Accident, corrosion, tire alteration, vandalism, fire, theft or damages cause by nature.

7. Damage from overinflation or under-inflation, overloading, defective vehicle mechanical conditions.

8. Non-racing or off-road tires that are misused or abused for racing or off-road purposes.

9. Ozone or weather cracking or other abuse, misuse, tire alteration, run flat.

10. Tire which D.O.T identification number and/or brand name removed intentionally.

11. Tires that have been modified after leaving the factory , such as fillers, sealants, balancing substances and external tire treatments or materials of any kind. If the added material is the cause of a failure, a tire will not be accepted for warranty claim.

12. Abnormal tread wear resulting from improper installation, wheel misalignment, tire/wheel assembly imbalance, etc.

13. Vehicles or tires operated in excess of the rated Work Capacity Factor.

14. Additional monetary loss, such as damage of the vehicle or time, etc.

Casing Warranty

We offers retreading guarantees for Truck and Bus Tires. if the tires cannot be retreaded due to the manufacturer's own reasons, a subsidy will be provided. This renovation rule applies only to the United States and Canada.

The LEAO brand offers a 6-year warranty with 2 retreads; Some specified patterns offer a 7-year warranty with 3 retreads; Some specified patterns offer a 8-year warranty with 4 retreads; The specific details of the specified patterns are as follows.

Mileage Warranty Product List:

Brand	Warranty	Specified tire patterns
LEAO	Warranty period for retreading is 6 years, and can be retreaded 2 times.	
	For the specified tire patterns, Some specified patterns offer a 7-year warranty with 3 retreads.	ADL11
		ADL12
		ATL11
		AAR21
		AAR22
		ADR21
		ATR21
		AAR22s
	Some specified patterns offer a 8-year warranty with 4 retreads.	ASL12 PRO
		ADL12 PRO

To Make a Claim Under This Limited Warranty

- At the time of purchase, tires must be properly installed with recommended inflation and balanced. Observe rotation and alignment regularly according to recommendations.
- Refer to any authorized the Company's dealer or point of purchase for adjustment claim.
- Owner is responsible for service charges and applicable taxes.
- Submit a copy of the original purchase receipt to support the adjustment claim.

Dealer's Obligation and Claim Process

- The company's authorized dealer or customer (buyer) submit adjustment claim along with a cut-out slice of full DOT serial from the disabled tire, measurements of tread remaining, photos showing tread area as well as damage area, etc. to LINGLONG TIRE to validate and process the adjustment claim.
- Any other information such as VIN(Vehicle Identification Number) or relevant information / material must be submitted if required.

Tire Safety and Maintenance

Tire failure can result in serious damage and/or personal injury. To reduce these risks we recommend the following :

1、Maintain proper inflation, do not under or over inflate. Always maintain inflation according to the vehicle manufacturer's or the Company's recommendations.

2、Wheel alignment and balancing should be checked at regular intervals.

3、Do not overload, refer to load carrying capacity information molded on tire sidewall.

4、Avoid spinning, driving over curbs, potholes, obstacles and edges of pavement.

5、Never drive with smooth(bald) tires. By law, tires must be replaced when worn to TWI (tread wear indicator).

6、Check your tires frequently for any damage such as scrapes, cuts, foreign objects, separations or bulges. If damaged replace it with spare and refer to an authorized dealer.

7、Do not drive in excess of permitted speed limits and beyond the maximum specified by tire.

8、To achieve proper wear and optimize tread life, rotate your tires at least every 6000 miles.

Exclusions, Limitations, and Legal Rights

No representative or dealer is authorized to make any representation, promise, or agreement on behalf of Linglong, except as expressly stated in this document. Any tire, regardless of construction quality, may fail in service or otherwise become unserviceable due to conditions beyond the manufacturer's control. This warranty does not constitute a representation that tire failure will not occur under any circumstances.

DISCLAIMER: This warranty is provided in lieu of all other warranties and representations, express or implied. Linglong expressly disclaims any and all implied warranties, including but not limited to the implied warranties of merchantability and fitness for a particular purpose. No other warranty or representation of any kind shall be deemed to exist or arise by operation of law.

LIMITATION OF DAMAGES: Under no circumstances shall Linglong be liable for any indirect, special, incidental, consequential, or punitive damages, including but not limited to loss of profits, business interruption, loss of reputation or goodwill, or costs related to replacement transportation or other associated expenses. Certain states or provinces do not allow the exclusion or limitation of incidental or consequential damages; therefore, some portions of this limitation may not be enforceable in specific jurisdictions.

This warranty sets forth specific legal obligations, and additional rights may apply depending on the governing state or provincial law.